


ADS-N8-2.4/8

N Jack To 2.4 Jack  
18GHz VSWR 1.15

50Ω

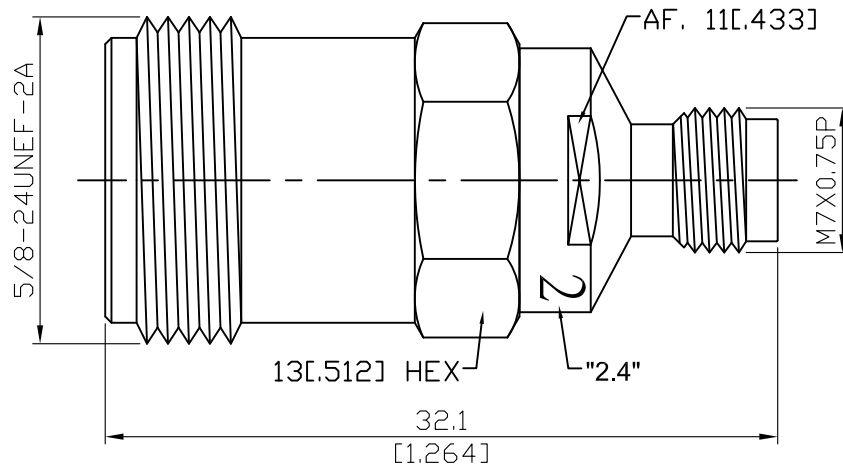

Parts	Material	Plating ( Micro-inch )
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-N8-2.4/8	N Jack To 2.4 Jack 18GHz VSWR 1.15															
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="129 398 531 488">Standard Mechanically compatible with</p>	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th data-bbox="780 344 1123 394">2.4</th> <th data-bbox="1123 344 1482 394">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 398 1123 443">MIL-STD-348B</td> <td data-bbox="1123 398 1482 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 488">1.85</td> <td data-bbox="1123 443 1482 488"></td> </tr> </tbody> </table>	2.4	N	MIL-STD-348B	MIL-STD-348B	1.85										
2.4	N															
MIL-STD-348B	MIL-STD-348B															
1.85																
<div data-bbox="129 604 531 654" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p data-bbox="129 658 531 703">Impedance</p> <p data-bbox="129 707 531 752">Frequency Range</p> <p data-bbox="129 757 531 801">VSWR</p> <p data-bbox="129 806 531 851">Insertion Loss</p> <p data-bbox="129 855 531 900">Insulation Resistance</p> <p data-bbox="129 904 531 949">Dielectric Withstanding Voltage (at sea level)</p> <p data-bbox="129 954 531 999">Working Voltage (at sea level)</p>	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">50Ω</td> </tr> <tr> <td></td> <td style="text-align: center;">DC to 18GHz</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 1.15 (DC to 18GHz)</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 0.03 x √f(GHz) dB</td> </tr> <tr> <td></td> <td style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td></td> <td style="text-align: center;">500 V rms</td> </tr> <tr> <td></td> <td style="text-align: center;">150 V rms</td> </tr> </tbody> </table>			50Ω		DC to 18GHz		≤ 1.15 (DC to 18GHz)		≤ 0.03 x √f(GHz) dB		≥ 5000MΩ		500 V rms		150 V rms
	50Ω															
	DC to 18GHz															
	≤ 1.15 (DC to 18GHz)															
	≤ 0.03 x √f(GHz) dB															
	≥ 5000MΩ															
	500 V rms															
	150 V rms															
<div data-bbox="129 1104 531 1153" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p data-bbox="129 1158 531 1202">Recommended Coupling Nut Torque</p> <p data-bbox="129 1207 531 1252">Coupling Proof Torque</p> <p data-bbox="129 1256 531 1301">Contact Captivation-axial</p> <p data-bbox="129 1305 531 1350">Durability (mating)</p>	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th data-bbox="780 1104 1123 1153">2.4</th> <th data-bbox="1123 1104 1482 1153">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1158 1123 1202">7.08 to 9.74 inch lbs</td> <td data-bbox="1123 1158 1482 1202">6 to 10 inch lbs</td> </tr> <tr> <td data-bbox="780 1207 1123 1252">15 inch lbs</td> <td data-bbox="1123 1207 1482 1252">15 inch lbs</td> </tr> <tr> <td data-bbox="780 1256 1123 1301">≥ 4.5 lbs</td> <td data-bbox="1123 1256 1482 1301">≥ 6.3 lbs</td> </tr> <tr> <td data-bbox="780 1305 1123 1350">≥ 500</td> <td data-bbox="1123 1305 1482 1350">≥ 500</td> </tr> </tbody> </table>		2.4	N	7.08 to 9.74 inch lbs	6 to 10 inch lbs	15 inch lbs	15 inch lbs	≥ 4.5 lbs	≥ 6.3 lbs	≥ 500	≥ 500				
2.4	N															
7.08 to 9.74 inch lbs	6 to 10 inch lbs															
15 inch lbs	15 inch lbs															
≥ 4.5 lbs	≥ 6.3 lbs															
≥ 500	≥ 500															
<div data-bbox="129 1456 531 1505" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p data-bbox="129 1509 531 1554">Temperature Range</p> <p data-bbox="129 1559 531 1603">Thermal Shock</p> <p data-bbox="129 1608 531 1653">Moisture Resistance</p> <p data-bbox="129 1657 531 1702">Corrosion</p> <p data-bbox="129 1706 531 1751">RoHS</p>	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">-65°C to +165°C</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">Compliant</td> </tr> </tbody> </table>			-65°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant				
	-65°C to +165°C															
	MIL-STD-202, Method 107, Condition B															
	MIL-STD-202, Method 206															
	MIL-STD-202, Method 101, Condition B															
	Compliant															

# ADS-N8-2.4/8

