


ADS-N8T8-18-1.15

Stainless N Jack To TNC Jack
18GHz VSWR 1.15

50Ω

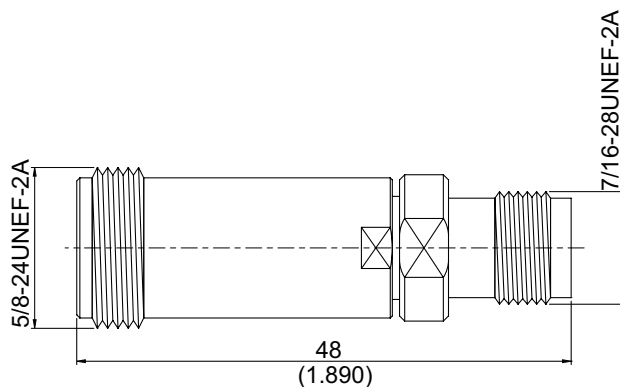

Parts	Material	Plating (Micro-inch)
Body	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-N8T8-18-1.15	Stainless N Jack To TNC Jack 18GHz VSWR 1.15	
<div style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard</p>	<div style="border-bottom: 1px solid black; padding: 2px;">N</div> <p>MIL-STD-348B</p>	<div style="border-bottom: 1px solid black; padding: 2px;">TNC</div> <p>MIL-STD-348B</p>
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p>Impedance</p> <p>Frequency Range</p> <p>VSWR</p> <p>Insertion Loss</p> <p>Insulation Resistance</p> <p>Dielectric Withstanding Voltage (at sea level)</p> <p>Working Voltage (at sea level)</p>	<p>50Ω</p> <p>DC To 18GHz</p> <p>≤ 1.15 (DC To 18GHz)</p> <p>≤ 0.05 x √f(GHz) dB</p> <p>≥ 5000MΩ</p> <p>1500 V rms</p> <p>500 V rms</p>	
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p>Recommended Coupling Nut Torque</p> <p>Coupling Proof Torque</p> <p>Contact Captivation-axial</p> <p>Durability (mating)</p>	<div style="border-bottom: 1px solid black; padding: 2px;">N</div> <p>6 to 10 in-lbs</p> <p>15 in-lbs</p> <p>≥ 6.3 lbs</p> <p>≥ 500</p>	<div style="border-bottom: 1px solid black; padding: 2px;">TNC</div> <p>4.1 to 6.1 in-lbs</p> <p>15 in-lbs</p> <p>≥ 6.1 lbs</p> <p>≥ 500</p>
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p>Temperature Range</p> <p>Thermal Shock</p> <p>Moisture Resistance</p> <p>Corrosion</p> <p>RoHS</p>	<p>-65°C to +165°C</p> <p>MIL-STD-202, Method 107, Condition B</p> <p>MIL-STD-202, Method 206</p> <p>MIL-STD-202, Method 101, Condition B</p> <p>Compliant</p>	

ADS-N8T8-18-1.15

