


ADS-PL3-2.4/3

SMP Plug Limited Detent To 2.4mm Plug
40GHz VSWR 1.3

50Ω

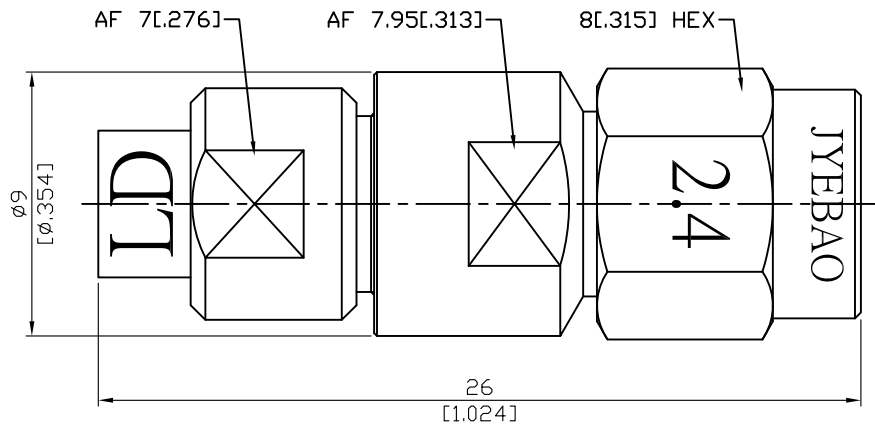

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-PL3-2.4/3		SMP Plug Limited Detent To 2.4mm Plug 40GHz VSWR 1.3		
Interface		2.4	SMP	
Standard		MIL-STD-348B	MIL-STD-348B	
Mechanically compatible with		1.85		
Electrical Data				
Impedance		50Ω		
Frequency Range		DC To 40GHz		
VSWR		≤ 1.3 (DC To 40GHz)		
Insertion Loss		≤ 0.05 x √f(GHz) dB		
Insulation Resistance		≥ 5000MΩ		
Dielectric Withstanding Voltage (at sea level)		500 V rms		
Working Voltage (at sea level)		150 V rms		
Mechanical Data		2.4	SMP	
			Full detent	Limited detent
				Smooth bore Catchers Mit
Recommended Coupling Nut Torque		7.08 to 9.74 in-lbs	NA	NA
Coupling Proof Torque		15 in-lbs	NA	NA
Coupling Nut Retention Force		≥ 60.7 lbs	NA	NA
Contact Captivation-axial		≥ 4.5 lbs	NA	NA
Durability (mating)		≥ 500	≥ 100	≥ 500
Engagement Force		NA	≤ 15 lbs	≤ 10 lbs
Disengagement Force		NA	≥ 5 lbs	≥ 2 lbs
Axial Misalignment		NA	+0.00/-0.25(+.000/-.010)	
Radial Misalignment		NA	+/-0.25(0.010)	
Environmental Data				
Temperature Range		-55°C to +105°C		
Thermal Shock		MIL-STD-202, Method 107, Condition B		
Moisture Resistance		MIL-STD-202, Method 206		
Corrosion		MIL-STD-202, Method 101, Condition B		
RoHS		Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-PL3-2.4/3

