


ADS-T3T3-18A-1.15

Stainless Precision TNC Plug To TNC Plug
18GHz VSWR 1.15

50Ω

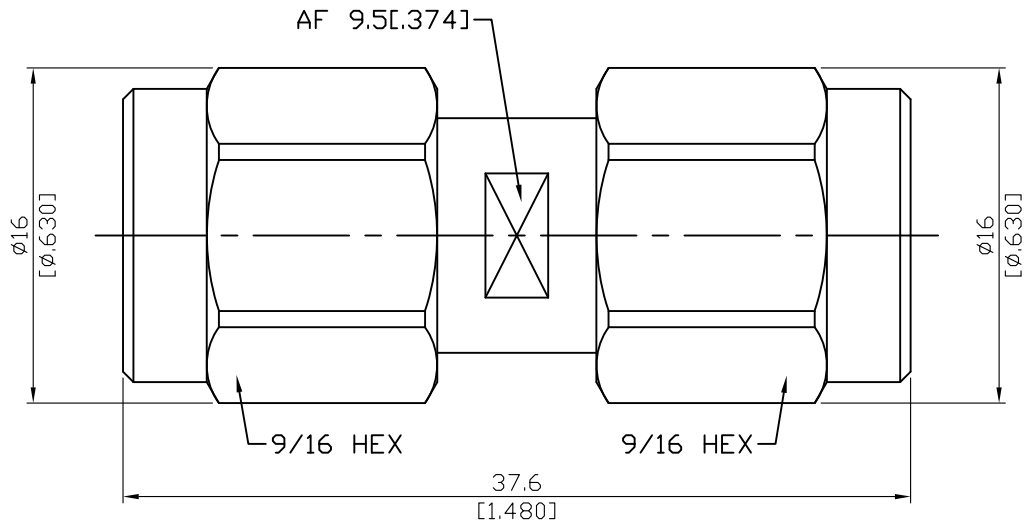

Parts	Material	Plating (Micro-inch)
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-T3T3-18A-1.15	Stainless Precision TNC Plug To TNC Plug 18GHz VSWR 1.15																
<table border="0"> <tr> <td data-bbox="113 322 531 394">Interface</td> <td data-bbox="531 322 1481 394"></td> </tr> <tr> <td data-bbox="113 394 531 539">Standard</td> <td data-bbox="531 394 1481 539">MIL-STD-348B</td> </tr> </table>		Interface		Standard	MIL-STD-348B												
Interface																	
Standard	MIL-STD-348B																
<table border="0"> <tr> <td data-bbox="113 539 531 611">Electrical Data</td> <td data-bbox="531 539 1481 611"></td> </tr> <tr> <td data-bbox="113 611 531 656">Impedance</td> <td data-bbox="531 611 1481 656">50Ω</td> </tr> <tr> <td data-bbox="113 656 531 701">Frequency Range</td> <td data-bbox="531 656 1481 701">DC to 18GHz</td> </tr> <tr> <td data-bbox="113 701 531 745">VSWR</td> <td data-bbox="531 701 1481 745">≤ 1.15 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="113 745 531 790">Insertion Loss</td> <td data-bbox="531 745 1481 790">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="113 790 531 835">Insulation Resistance</td> <td data-bbox="531 790 1481 835">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="113 835 531 880">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 835 1481 880">1000 V rms</td> </tr> <tr> <td data-bbox="113 880 531 925">Working Voltage (at sea level)</td> <td data-bbox="531 880 1481 925">500 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 18GHz	VSWR	≤ 1.15 (DC To 18GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1000 V rms	Working Voltage (at sea level)	500 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC to 18GHz																
VSWR	≤ 1.15 (DC To 18GHz)																
Insertion Loss	≤ 0.05 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1000 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0"> <tr> <td data-bbox="113 1037 531 1108">Mechanical Data</td> <td data-bbox="531 1037 1481 1108"></td> </tr> <tr> <td data-bbox="113 1108 531 1153">Recommended Coupling Nut Torque</td> <td data-bbox="531 1108 1481 1153">4.1 to 6.1 in-lbs</td> </tr> <tr> <td data-bbox="113 1153 531 1198">Coupling Proof Torque</td> <td data-bbox="531 1153 1481 1198">15 in-lbs</td> </tr> <tr> <td data-bbox="113 1198 531 1243">Coupling Nut Retention Force</td> <td data-bbox="531 1198 1481 1243">≥ 101.2 lbs</td> </tr> <tr> <td data-bbox="113 1243 531 1288">Contact Captivation-axial</td> <td data-bbox="531 1243 1481 1288">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="113 1288 531 1332">Durability (mating)</td> <td data-bbox="531 1288 1481 1332">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	4.1 to 6.1 in-lbs	Coupling Proof Torque	15 in-lbs	Coupling Nut Retention Force	≥ 101.2 lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500				
Mechanical Data																	
Recommended Coupling Nut Torque	4.1 to 6.1 in-lbs																
Coupling Proof Torque	15 in-lbs																
Coupling Nut Retention Force	≥ 101.2 lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td data-bbox="113 1435 531 1507">Environmental Data</td> <td data-bbox="531 1435 1481 1507"></td> </tr> <tr> <td data-bbox="113 1507 531 1552">Temperature Range</td> <td data-bbox="531 1507 1481 1552">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1552 531 1597">Thermal Shock</td> <td data-bbox="531 1552 1481 1597">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1597 531 1641">Moisture Resistance</td> <td data-bbox="531 1597 1481 1641">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1641 531 1686">Corrosion</td> <td data-bbox="531 1641 1481 1686">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1686 531 1731">RoHS</td> <td data-bbox="531 1686 1481 1731">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

ADS-T3T3-18A-1.15

