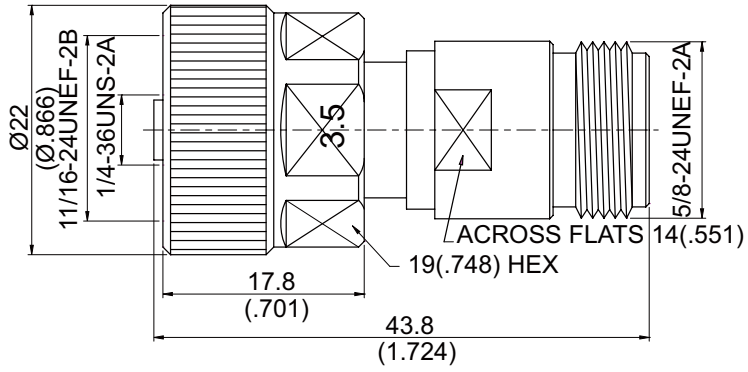


<p>ADS-VNAPC8N8</p>	<p>3.5mm NMD jack to N jack 18GHz VSWR 1.15</p>	<p>50Ω</p>															
 <p>The drawing shows a side view of the connector assembly. From left to right: a female N connector with a diameter of $\varnothing 22$ and a length of 11/16-24UNEF-2B (0.866 inches), a 3.5mm NMD jack with a length of 1/4-36UNS-2A (0.25 inches), a central coupling nut with a length of 17.8 (0.701 inches), a male N connector with a length of 5/8-24UNEF-2A (0.625 inches), and a hexagonal nut with a length of 19 (0.748 inches). The total length of the assembly is 43.8 (1.724 inches). The hex nut has 'ACROSS FLATS' and a width of 14 (0.551 inches).</p>																	
<p>Note: NMD 3.5 Jack to be mounted directly on vector network analyser.</p>																	
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Insulator</td> <td>PEI</td> <td></td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Body</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> <tr> <td>Coupling Nut</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Insulator	PEI		Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body	Stainless Steel	Passivated	Coupling Nut	Stainless Steel	Passivated
Parts	Material	Plating (Micro-inch)															
Insulator	PEI																
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20															
Body	Stainless Steel	Passivated															
Coupling Nut	Stainless Steel	Passivated															
<p>Weight:</p>																	

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-VNAPC8N8	3.5mm NMD jack to N jack 18GHz VSWR 1.15																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: center;">3.5</th> <th style="width: 50%; text-align: center;">N</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">MIL-STD-348B</td> </tr> <tr> <td style="text-align: center;">2.92 & SMA</td> <td></td> </tr> </tbody> </table>	3.5	N	MIL-STD-348B	MIL-STD-348B	2.92 & SMA																	
3.5	N																						
MIL-STD-348B	MIL-STD-348B																						
2.92 & SMA																							
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2" style="text-align: center;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2" style="text-align: center;">DC To 18GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2" style="text-align: center;">≤ 1.15 (DC To 18GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2" style="text-align: center;">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2" style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">1100 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">335 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 18GHz		VSWR	≤ 1.15 (DC To 18GHz)		Insertion Loss	≤ 0.05 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1100 V rms		Working Voltage (at sea level)	335 V rms	
Impedance	50Ω																						
Frequency Range	DC To 18GHz																						
VSWR	≤ 1.15 (DC To 18GHz)																						
Insertion Loss	≤ 0.05 x √f(GHz) dB																						
Insulation Resistance	≥ 5000MΩ																						
Dielectric Withstanding Voltage (at sea level)	1100 V rms																						
Working Voltage (at sea level)	335 V rms																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center;">3.5</th> <th style="width: 25%; text-align: center;">N</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">7.1 to 9.7 in-lbs</td> <td style="text-align: center;">6 to 10 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.1 lbs</td> <td style="text-align: center;">≥ 6.3 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>			3.5	N	Recommended Coupling Nut Torque	7.1 to 9.7 in-lbs	6 to 10 in-lbs	Coupling Proof Torque	15 in-lbs	15 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	≥ 6.3 lbs	Durability (mating)	≥ 500	≥ 500						
	3.5	N																					
Recommended Coupling Nut Torque	7.1 to 9.7 in-lbs	6 to 10 in-lbs																					
Coupling Proof Torque	15 in-lbs	15 in-lbs																					
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.3 lbs																					
Durability (mating)	≥ 500	≥ 500																					
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2" style="text-align: center;">-40°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2" style="text-align: center;">Compliant</td> </tr> </tbody> </table>		Temperature Range	-40°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Temperature Range	-40°C to +165°C																						
Thermal Shock	MIL-STD-202, Method 107, Condition B																						
Moisture Resistance	MIL-STD-202, Method 206																						
Corrosion	MIL-STD-202, Method 101, Condition B																						
RoHS	Compliant																						

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-VNAPC8N8

