


ADSG-SA8SA8-A-18-1.2	SSMA Jack to SSMA Jack 18GHz VSWR 1.2	50Ω
----------------------	--	-----

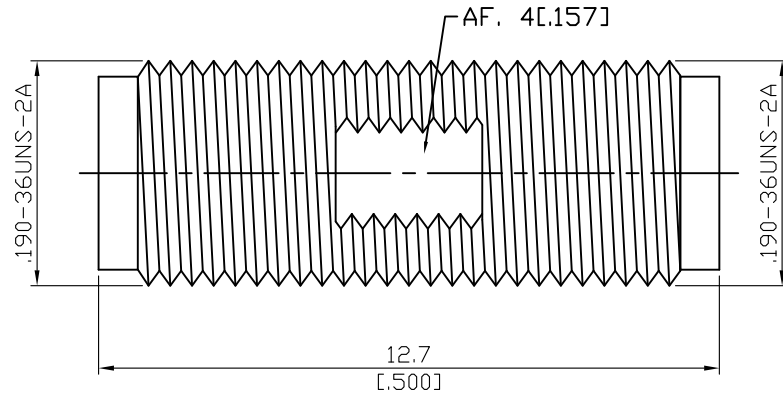

Parts	Material	Plating (Micro-inch)
Body	Stainless Steel	Passivated
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

--	--


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADSG-SA8SA8-A-18-1.2	SSMA Jack to SSMA Jack 18GHz VSWR 1.2																
<table border="0"> <tr> <td data-bbox="129 342 531 394">Interface</td> <td></td> </tr> <tr> <td data-bbox="129 398 531 439">Standard</td> <td data-bbox="794 398 1011 439">MIL-STD-348B</td> </tr> </table>		Interface		Standard	MIL-STD-348B												
Interface																	
Standard	MIL-STD-348B																
<table border="0"> <tr> <td data-bbox="129 560 531 611">Electrical Data</td> <td></td> </tr> <tr> <td data-bbox="129 616 531 656">Impedance</td> <td data-bbox="794 616 858 656">50Ω</td> </tr> <tr> <td data-bbox="129 660 531 701">Frequency Range</td> <td data-bbox="794 660 991 701">DC to 18GHz</td> </tr> <tr> <td data-bbox="129 705 531 745">VSWR</td> <td data-bbox="794 705 1107 745">≤ 1.2 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="129 750 531 790">Insertion Loss</td> <td data-bbox="794 750 1086 790">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 795 531 835">Insulation Resistance</td> <td data-bbox="794 795 954 835">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 840 531 880">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 840 946 880">750 V rms</td> </tr> <tr> <td data-bbox="129 884 531 925">Working Voltage (at sea level)</td> <td data-bbox="794 884 946 925">250 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 18GHz	VSWR	≤ 1.2 (DC To 18GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC to 18GHz																
VSWR	≤ 1.2 (DC To 18GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	750 V rms																
Working Voltage (at sea level)	250 V rms																
<table border="0"> <tr> <td data-bbox="129 1057 531 1108">Mechanical Data</td> <td></td> </tr> <tr> <td data-bbox="129 1113 531 1153">Recommended Coupling Nut Torque</td> <td data-bbox="794 1113 903 1153">4 in-lbs</td> </tr> <tr> <td data-bbox="129 1158 531 1198">Coupling Proof Torque</td> <td data-bbox="794 1158 903 1198">5 in-lbs</td> </tr> <tr> <td data-bbox="129 1202 531 1243">Contact Captivation-axial</td> <td data-bbox="794 1202 900 1243">≥ 5 lbs</td> </tr> <tr> <td data-bbox="129 1247 531 1288">Durability (mating)</td> <td data-bbox="794 1247 884 1288">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	4 in-lbs	Coupling Proof Torque	5 in-lbs	Contact Captivation-axial	≥ 5 lbs	Durability (mating)	≥ 500						
Mechanical Data																	
Recommended Coupling Nut Torque	4 in-lbs																
Coupling Proof Torque	5 in-lbs																
Contact Captivation-axial	≥ 5 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td data-bbox="129 1460 531 1512">Environmental Data</td> <td></td> </tr> <tr> <td data-bbox="129 1516 531 1556">Temperature Range</td> <td data-bbox="794 1516 1034 1556">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1561 531 1601">Thermal Shock</td> <td data-bbox="794 1561 1362 1601">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1606 531 1646">Moisture Resistance</td> <td data-bbox="794 1606 1177 1646">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1650 531 1691">Corrosion</td> <td data-bbox="794 1650 1362 1691">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1695 531 1736">RoHS</td> <td data-bbox="794 1695 946 1736">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

ADSG-SA8SA8-A-18-1.2

SoftPlot Measurement Presentation
VSWR S11

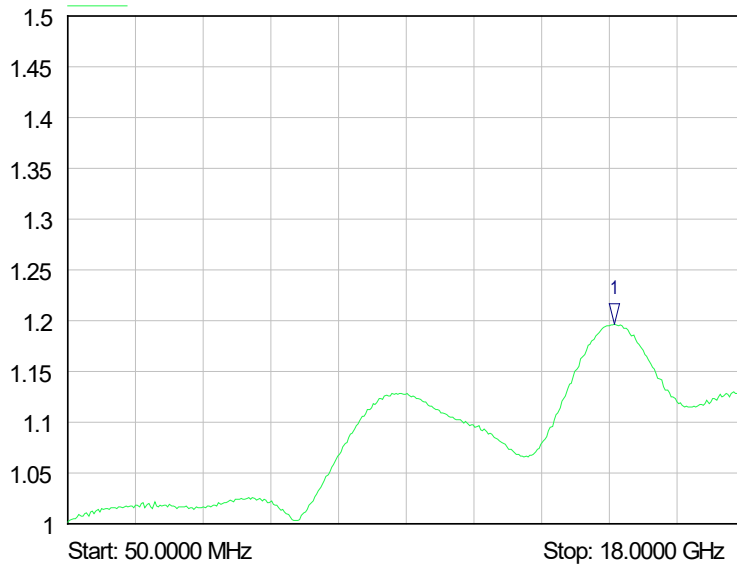

1 S11
14.5500 GHz
1.20 VSWR