


AL-B3B8

BNC Plug To BNC Jack Right Angle
3GHz VSWR 1.2

50Ω

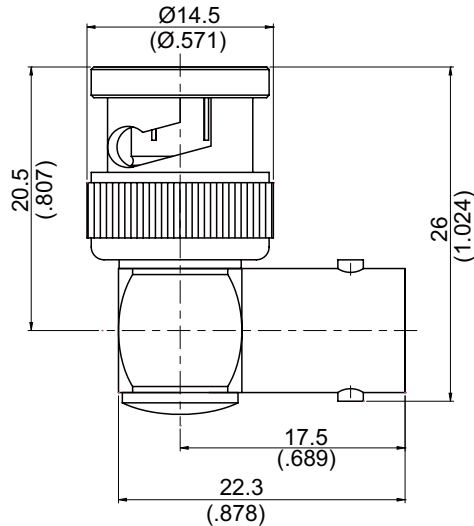

Parts	Material	Plating (Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 18.09 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AL-B3B8	BNC Plug To BNC Jack Right Angle 3GHz VSWR 1.2
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="129 398 264 434">Standard</p>	<p data-bbox="794 398 1011 434">MIL-STD-348B</p>
<div data-bbox="129 562 531 611" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p data-bbox="129 616 293 651">Impedance</p> <p data-bbox="129 656 389 692">Frequency Range</p> <p data-bbox="129 696 229 732">VSWR</p> <p data-bbox="129 736 333 772">Insertion Loss</p> <p data-bbox="129 777 440 813">Insulation Resistance</p> <p data-bbox="129 817 772 853">Dielectric Withstanding Voltage (at sea level)</p> <p data-bbox="129 857 563 893">Working Voltage (at sea level)</p>	<p data-bbox="794 616 858 651">50Ω</p> <p data-bbox="794 656 971 692">DC to 3GHz</p> <p data-bbox="794 696 1086 732">≤ 1.2 (DC To 3GHz)</p> <p data-bbox="794 736 1066 772">≤ 0.1 x √f(GHz) dB</p> <p data-bbox="794 777 954 813">≥ 5000MΩ</p> <p data-bbox="794 817 963 853">1500 V rms</p> <p data-bbox="794 857 946 893">500 V rms</p>
<div data-bbox="129 1059 531 1108" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p data-bbox="129 1113 657 1149">Recommended Coupling Nut Torque</p> <p data-bbox="129 1153 557 1189">Coupling Nut Retention Force</p> <p data-bbox="129 1193 491 1229">Contact Captivation-axial</p> <p data-bbox="129 1234 394 1270">Durability (mating)</p>	<p data-bbox="794 1113 1018 1149">0.6 to 2.5 in-lbs</p> <p data-bbox="794 1153 960 1189">≥ 101.2 lbs</p> <p data-bbox="794 1193 925 1229">≥ 6.1 lbs</p> <p data-bbox="794 1234 884 1270">≥ 500</p>
<div data-bbox="129 1413 531 1462" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p data-bbox="129 1467 421 1503">Temperature Range</p> <p data-bbox="129 1507 352 1543">Thermal Shock</p> <p data-bbox="129 1547 424 1583">Moisture Resistance</p> <p data-bbox="129 1588 272 1624">Corrosion</p> <p data-bbox="129 1628 220 1664">RoHS</p>	<p data-bbox="794 1467 1034 1503">-65°C to +165°C</p> <p data-bbox="794 1507 1362 1543">MIL-STD-202, Method 107, Condition B</p> <p data-bbox="794 1547 1177 1583">MIL-STD-202, Method 206</p> <p data-bbox="794 1588 1362 1624">MIL-STD-202, Method 101, Condition B</p> <p data-bbox="794 1628 946 1664">Compliant</p>

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AL-B3B8

