


ALS-A8A8-27-1.1

Mitered SMA Jack To SMA Jack  
27GHz VSWR 1.1

50Ω

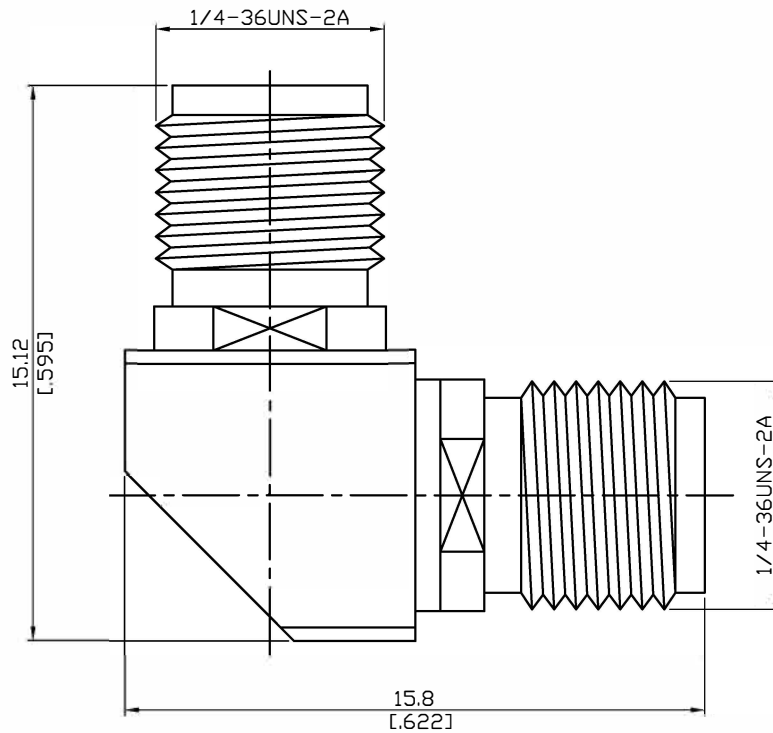

Parts	Material	Plating ( Micro-inch )
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ALS-A8A8-27-1.1	Mitered SMA Jack To SMA Jack 27GHz VSWR 1.1																
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 394"><b>Interface</b></td> </tr> <tr> <td data-bbox="129 400 794 439">Standard</td> <td data-bbox="794 400 1481 439">MIL-STD-348B</td> </tr> <tr> <td data-bbox="129 448 794 486">Mechanically compatible with</td> <td data-bbox="794 448 1481 486">2.92 &amp; 3.5</td> </tr> </table>		<b>Interface</b>		Standard	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5										
<b>Interface</b>																	
Standard	MIL-STD-348B																
Mechanically compatible with	2.92 & 3.5																
<table border="0"> <tr> <td colspan="2" data-bbox="129 604 531 656"><b>Electrical Data</b></td> </tr> <tr> <td data-bbox="129 663 794 701">Impedance</td> <td data-bbox="794 663 1481 701">50Ω</td> </tr> <tr> <td data-bbox="129 710 794 748">Frequency Range</td> <td data-bbox="794 710 1481 748">DC To 27GHz</td> </tr> <tr> <td data-bbox="129 757 794 795">VSWR</td> <td data-bbox="794 757 1481 795">≤ 1.1 (DC To 27GHz)</td> </tr> <tr> <td data-bbox="129 804 794 842">Insertion Loss</td> <td data-bbox="794 804 1481 842">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 851 794 889">Insulation Resistance</td> <td data-bbox="794 851 1481 889">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 898 794 936">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 898 1481 936">1500 V rms</td> </tr> <tr> <td data-bbox="129 945 794 983">Working Voltage (at sea level)</td> <td data-bbox="794 945 1481 983">500 V rms</td> </tr> </table>		<b>Electrical Data</b>		Impedance	50Ω	Frequency Range	DC To 27GHz	VSWR	≤ 1.1 (DC To 27GHz)	Insertion Loss	≤ 0.06 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms
<b>Electrical Data</b>																	
Impedance	50Ω																
Frequency Range	DC To 27GHz																
VSWR	≤ 1.1 (DC To 27GHz)																
Insertion Loss	≤ 0.06 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1500 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1102 531 1153"><b>Mechanical Data</b></td> </tr> <tr> <td data-bbox="129 1160 794 1198">Recommended Coupling Nut Torque</td> <td data-bbox="794 1160 1481 1198">7 to 9.5 in-lbs</td> </tr> <tr> <td data-bbox="129 1207 794 1245">Coupling Proof Torque</td> <td data-bbox="794 1207 1481 1245">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1254 794 1292">Contact Captivation-axial</td> <td data-bbox="794 1254 1481 1292">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1301 794 1339">Durability (mating)</td> <td data-bbox="794 1301 1481 1339">≥ 500</td> </tr> </table>		<b>Mechanical Data</b>		Recommended Coupling Nut Torque	7 to 9.5 in-lbs	Coupling Proof Torque	15 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500						
<b>Mechanical Data</b>																	
Recommended Coupling Nut Torque	7 to 9.5 in-lbs																
Coupling Proof Torque	15 in-lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1503 531 1554"><b>Environmental Data</b></td> </tr> <tr> <td data-bbox="129 1561 794 1599">Temperature Range</td> <td data-bbox="794 1561 1481 1599">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1608 794 1646">Thermal Shock</td> <td data-bbox="794 1608 1481 1646">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1655 794 1693">Moisture Resistance</td> <td data-bbox="794 1655 1481 1693">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1702 794 1740">Corrosion</td> <td data-bbox="794 1702 1481 1740">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1749 794 1787">RoHS</td> <td data-bbox="794 1749 1481 1787">Compliant</td> </tr> </table>		<b>Environmental Data</b>		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
<b>Environmental Data</b>																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

# ALS-A8A8-27-1.1

