


ALS-A8A8-27-1.2

Mitered SMA Jack To SMA Jack  
27GHz VSWR 1.2

50Ω

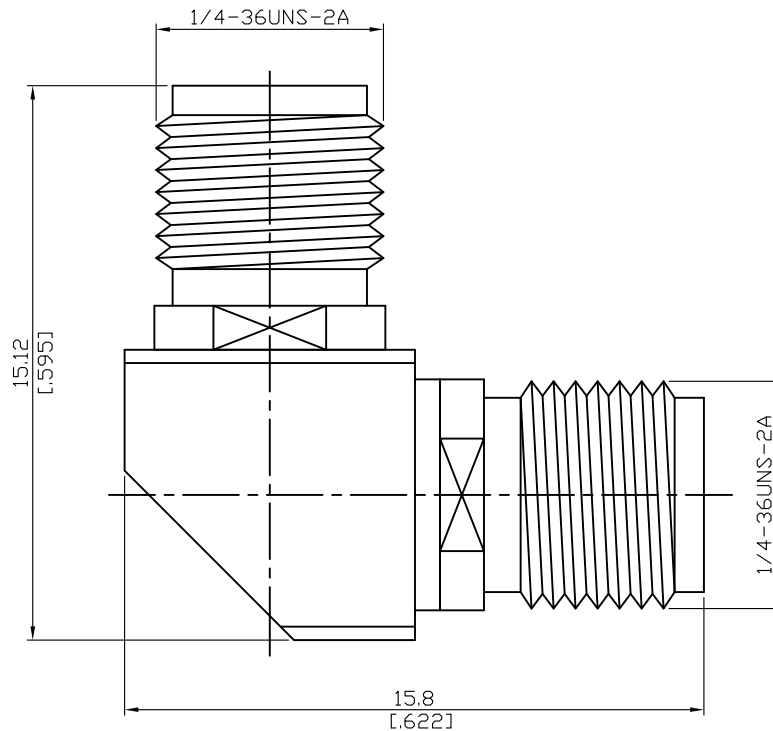

| Parts       | Material         | Plating ( Micro-inch )                                |
|-------------|------------------|---|
| Contact Pin | Beryllium Copper | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Insulator   | Teflon           |   |
| Body        | Stainless Steel  | Passivated  |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

|   |  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
|---|--|---------------------------|--|---------------------------------|-----------------|------------------------------|--------------------------------------|---------------------------|-------------------------|---------------------|--------------------------------------|-----------------------|-----------|--|------------|--------------------------------|-----------|
| ALS-A8A8-27-1.2   | Mitered SMA Jack To SMA Jack<br>27GHz VSWR 1.2 |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| <table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 342 531 392"><b>Interface</b></td> </tr> <tr> <td data-bbox="129 398 790 436">Standard</td> <td data-bbox="790 398 1482 436">MIL-STD-348B</td> </tr> <tr> <td data-bbox="129 443 790 481">Mechanically compatible with</td> <td data-bbox="790 443 1482 481">2.92 &amp; 3.5</td> </tr> </table>   |  | <b>Interface</b>          |  | Standard                        | MIL-STD-348B    | Mechanically compatible with | 2.92 & 3.5                           |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| <b>Interface</b>  |  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Standard  | MIL-STD-348B                                   |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Mechanically compatible with  | 2.92 & 3.5                                     |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| <table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 602 531 651"><b>Electrical Data</b></td> </tr> <tr> <td data-bbox="129 658 790 696">Impedance</td> <td data-bbox="790 658 1482 696">50Ω</td> </tr> <tr> <td data-bbox="129 703 790 741">Frequency Range</td> <td data-bbox="790 703 1482 741">DC To 27GHz</td> </tr> <tr> <td data-bbox="129 748 790 786">VSWR</td> <td data-bbox="790 748 1482 786">≤ 1.2 (DC To 27GHz)</td> </tr> <tr> <td data-bbox="129 792 790 831">Insertion Loss</td> <td data-bbox="790 792 1482 831">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 837 790 875">Insulation Resistance</td> <td data-bbox="790 837 1482 875">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 882 790 920">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="790 882 1482 920">1500 V rms</td> </tr> <tr> <td data-bbox="129 927 790 965">Working Voltage (at sea level)</td> <td data-bbox="790 927 1482 965">500 V rms</td> </tr> </table> |  | <b>Electrical Data</b>    |  | Impedance                       | 50Ω             | Frequency Range              | DC To 27GHz                          | VSWR                      | ≤ 1.2 (DC To 27GHz)     | Insertion Loss      | ≤ 0.06 x √f(GHz) dB                  | Insulation Resistance | ≥ 5000MΩ  | Dielectric Withstanding Voltage (at sea level) | 1500 V rms | Working Voltage (at sea level) | 500 V rms |
| <b>Electrical Data</b>  |  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Impedance   | 50Ω  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Frequency Range   | DC To 27GHz                                    |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| VSWR  | ≤ 1.2 (DC To 27GHz)                            |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Insertion Loss  | ≤ 0.06 x √f(GHz) dB                            |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Insulation Resistance   | ≥ 5000MΩ                                       |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Dielectric Withstanding Voltage (at sea level)  | 1500 V rms                                     |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Working Voltage (at sea level)  | 500 V rms                                      |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| <table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 1099 531 1149"><b>Mechanical Data</b></td> </tr> <tr> <td data-bbox="129 1155 790 1193">Recommended Coupling Nut Torque</td> <td data-bbox="790 1155 1482 1193">7 to 9.5 in-lbs</td> </tr> <tr> <td data-bbox="129 1200 790 1238">Coupling Proof Torque</td> <td data-bbox="790 1200 1482 1238">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1245 790 1283">Contact Captivation-axial</td> <td data-bbox="790 1245 1482 1283">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1290 790 1328">Durability (mating)</td> <td data-bbox="790 1290 1482 1328">≥ 500</td> </tr> </table>   |  | <b>Mechanical Data</b>    |  | Recommended Coupling Nut Torque | 7 to 9.5 in-lbs | Coupling Proof Torque        | 15 in-lbs                            | Contact Captivation-axial | ≥ 6.1 lbs               | Durability (mating) | ≥ 500                                |                       |           |  |            |                                |           |
| <b>Mechanical Data</b>  |  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Recommended Coupling Nut Torque   | 7 to 9.5 in-lbs                                |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Coupling Proof Torque   | 15 in-lbs                                      |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Contact Captivation-axial   | ≥ 6.1 lbs                                      |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Durability (mating)   | ≥ 500  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| <table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 1503 531 1552"><b>Environmental Data</b></td> </tr> <tr> <td data-bbox="129 1559 790 1597">Temperature Range</td> <td data-bbox="790 1559 1482 1597">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1603 790 1641">Thermal Shock</td> <td data-bbox="790 1603 1482 1641">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1648 790 1686">Moisture Resistance</td> <td data-bbox="790 1648 1482 1686">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1693 790 1731">Corrosion</td> <td data-bbox="790 1693 1482 1731">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1738 790 1776">RoHS</td> <td data-bbox="790 1738 1482 1776">Compliant</td> </tr> </table>   |  | <b>Environmental Data</b> |  | Temperature Range               | -65°C to +165°C | Thermal Shock                | MIL-STD-202, Method 107, Condition B | Moisture Resistance       | MIL-STD-202, Method 206 | Corrosion           | MIL-STD-202, Method 101, Condition B | RoHS                  | Compliant |  |            |                                |           |
| <b>Environmental Data</b>   |  |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Temperature Range   | -65°C to +165°C                                |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Thermal Shock   | MIL-STD-202, Method 107, Condition B           |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Moisture Resistance   | MIL-STD-202, Method 206                        |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| Corrosion   | MIL-STD-202, Method 101, Condition B           |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |
| RoHS  | Compliant                                      |                           |  |                                 |                 |                              |                                      |                           |                         |                     |                                      |                       |           |  |            |                                |           |

# ALS-A8A8-27-1.2

