


ALS-A8T8-18-1.3

Mitered SMA Jack To TNC Jack  
18GHz VSWR 1.3

50Ω

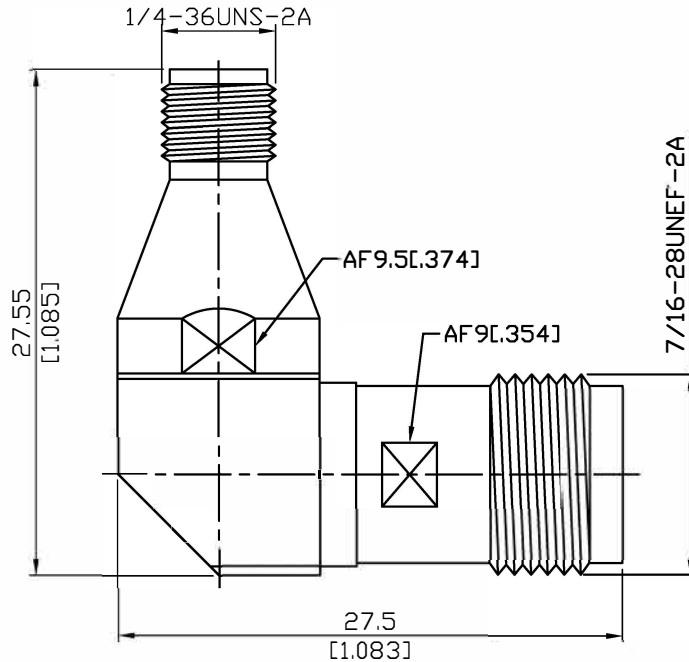

Parts	Material	Plating ( Micro-inch )
Ring	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ALS-A8T8-18-1.3	Mitered SMA Jack To TNC Jack 18GHz VSWR 1.3																									
<table border="1"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td data-bbox="531 324 1123 392">SMA</td> <td data-bbox="1123 324 1482 392">TNC</td> </tr> <tr> <td data-bbox="113 392 531 443">Standard</td> <td data-bbox="531 392 1123 443">MIL-STD-348B</td> <td data-bbox="1123 392 1482 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="113 443 531 584">Mechanically compatible with</td> <td data-bbox="531 443 1123 584">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1482 584"></td> </tr> </table>	Interface	SMA	TNC	Standard	MIL-STD-348B	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5																		
Interface	SMA	TNC																								
Standard	MIL-STD-348B	MIL-STD-348B																								
Mechanically compatible with	2.92 & 3.5																									
<table border="1"> <tr> <td data-bbox="113 584 531 651">Electrical Data</td> <td colspan="2" data-bbox="531 584 1482 651"></td> </tr> <tr> <td data-bbox="113 651 531 703">Impedance</td> <td colspan="2" data-bbox="531 651 1482 703">50Ω</td> </tr> <tr> <td data-bbox="113 703 531 754">Frequency Range</td> <td colspan="2" data-bbox="531 703 1482 754">DC To 18GHz</td> </tr> <tr> <td data-bbox="113 754 531 806">VSWR</td> <td colspan="2" data-bbox="531 754 1482 806">≤ 1.3 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="113 806 531 857">Insertion Loss</td> <td colspan="2" data-bbox="531 806 1482 857">≤ 0.07 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="113 857 531 909">Insulation Resistance</td> <td colspan="2" data-bbox="531 857 1482 909">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="113 909 531 960">Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" data-bbox="531 909 1482 960">1500 V rms</td> </tr> <tr> <td data-bbox="113 960 531 1081">Working Voltage (at sea level)</td> <td colspan="2" data-bbox="531 960 1482 1081">500 V rms</td> </tr> </table>	Electrical Data			Impedance	50Ω		Frequency Range	DC To 18GHz		VSWR	≤ 1.3 (DC To 18GHz)		Insertion Loss	≤ 0.07 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1500 V rms		Working Voltage (at sea level)	500 V rms			
Electrical Data																										
Impedance	50Ω																									
Frequency Range	DC To 18GHz																									
VSWR	≤ 1.3 (DC To 18GHz)																									
Insertion Loss	≤ 0.07 x √f(GHz) dB																									
Insulation Resistance	≥ 5000MΩ																									
Dielectric Withstanding Voltage (at sea level)	1500 V rms																									
Working Voltage (at sea level)	500 V rms																									
<table border="1"> <tr> <td data-bbox="113 1081 531 1149">Mechanical Data</td> <td data-bbox="531 1081 1123 1149">SMA</td> <td data-bbox="1123 1081 1482 1149">TNC</td> </tr> <tr> <td data-bbox="113 1149 531 1200">Recommended Coupling Nut Torque</td> <td data-bbox="531 1149 1123 1200">7 to 9.5 in-lbs</td> <td data-bbox="1123 1149 1482 1200">4.1 to 6.1 in-lbs</td> </tr> <tr> <td data-bbox="113 1200 531 1252">Coupling Proof Torque</td> <td data-bbox="531 1200 1123 1252">15 in-lbs</td> <td data-bbox="1123 1200 1482 1252">15 in-lbs</td> </tr> <tr> <td data-bbox="113 1252 531 1303">Contact Captivation-axial</td> <td data-bbox="531 1252 1123 1303">≥ 6.1 lbs</td> <td data-bbox="1123 1252 1482 1303">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="113 1303 531 1485">Durability (mating)</td> <td data-bbox="531 1303 1123 1485">≥ 500</td> <td data-bbox="1123 1303 1482 1485">≥ 500</td> </tr> </table>	Mechanical Data	SMA	TNC	Recommended Coupling Nut Torque	7 to 9.5 in-lbs	4.1 to 6.1 in-lbs	Coupling Proof Torque	15 in-lbs	15 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs	Durability (mating)	≥ 500	≥ 500											
Mechanical Data	SMA	TNC																								
Recommended Coupling Nut Torque	7 to 9.5 in-lbs	4.1 to 6.1 in-lbs																								
Coupling Proof Torque	15 in-lbs	15 in-lbs																								
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs																								
Durability (mating)	≥ 500	≥ 500																								
<table border="1"> <tr> <td data-bbox="113 1485 531 1552">Environmental Data</td> <td colspan="2" data-bbox="531 1485 1482 1552"></td> </tr> <tr> <td data-bbox="113 1552 531 1603">Temperature Range</td> <td colspan="2" data-bbox="531 1552 1482 1603">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1603 531 1655">Thermal Shock</td> <td colspan="2" data-bbox="531 1603 1482 1655">MIL-STD-202, Method</td> </tr> <tr> <td data-bbox="113 1655 531 1706">Moisture Resistance</td> <td colspan="2" data-bbox="531 1655 1482 1706">MIL-STD-202, Method</td> </tr> <tr> <td data-bbox="113 1706 531 1758">Corrosion</td> <td colspan="2" data-bbox="531 1706 1482 1758">MIL-STD-202, Method</td> </tr> <tr> <td data-bbox="113 1758 531 1998">RoHS</td> <td colspan="2" data-bbox="531 1758 1482 1998">Compliant</td> </tr> </table>	Environmental Data			Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method		Moisture Resistance	MIL-STD-202, Method		Corrosion	MIL-STD-202, Method		RoHS	Compliant									
Environmental Data																										
Temperature Range	-65°C to +165°C																									
Thermal Shock	MIL-STD-202, Method																									
Moisture Resistance	MIL-STD-202, Method																									
Corrosion	MIL-STD-202, Method																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# ALS-A8T8-18-1.3

