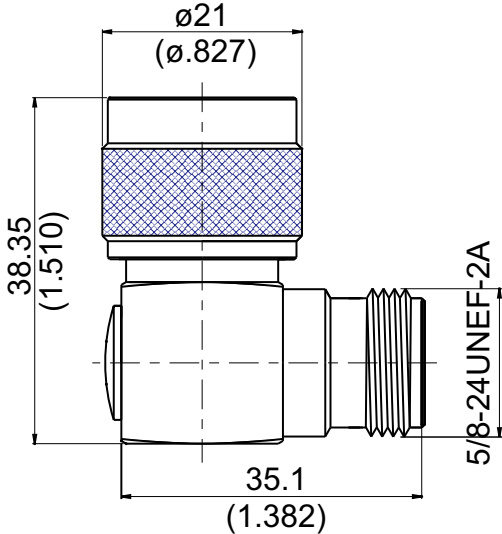


ALS-N3N8	N Plug To N Jack Right Angle 11GHz VSWR 1.2      50Ω	
		
Parts	Material	Plating (Micro-inch)
Nut	Stainless	Passivated
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Body	Stainless	Passivated
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Insulator	Teflon	
Body	Stainless	Passivated
Coupling Nut	Stainless	Passivated
Weight: 81.35 g		

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

ALS-N3N8	N Plug to N Jack Right Angle 11GHz VSWR 1.2
<b>Interface</b> Standard	MIL-STD-348B
<b>Electrical Data</b> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 11GHz ≤ 1.2 (DC To 11GHz) ≤ 0.07 x √f(GHz) dB ≥ 5000MΩ 2500 V rms 1000 V rms
<b>Mechanical Data</b> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	6 to 10 in-lbs 15 in-lbs ≥ 101.2 lbs ≥ 6.3 lbs ≥ 500
<b>Environmental Data</b> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.