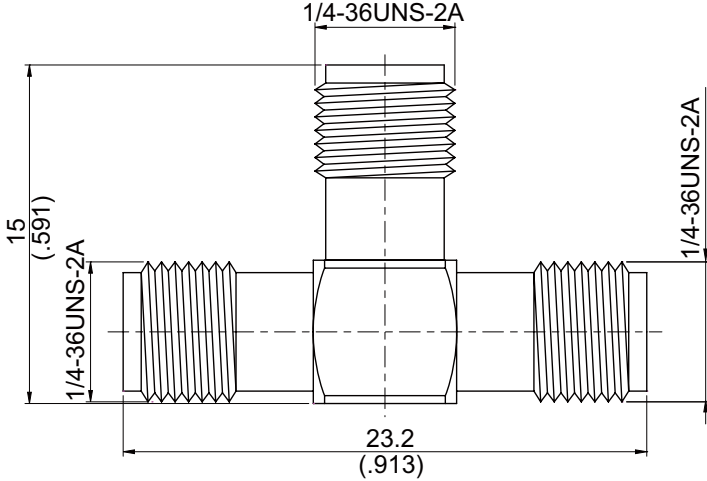


ATS-A8A8A8	Stainless SMA Jack To SMA Jack To SMA Jack	50Ω															
 <p>NOTE: T-adaptor is a non-matched 3 dB divider for low frequency applications. VSWR ≥ 2.0 when terminated 50 Ω.</p>																	
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Cover</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Stainless Steel</td> <td>Passivated</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Cover	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Stainless Steel	Passivated
Parts	Material	Plating (Micro-inch)															
Cover	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50															
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20															
Insulator	Teflon																
Body	Stainless Steel	Passivated															
Weight:																	

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.