



NO.	COMPONENTS	IMPEDANCE
1	BNC MALE RIGHT ANGLE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM
3	BNC FEMALE FOR BULKHEAD	50 OHM

BNC MALE
RIGHT ANGLE



BNC FEMALE
FOR BULKHEAD

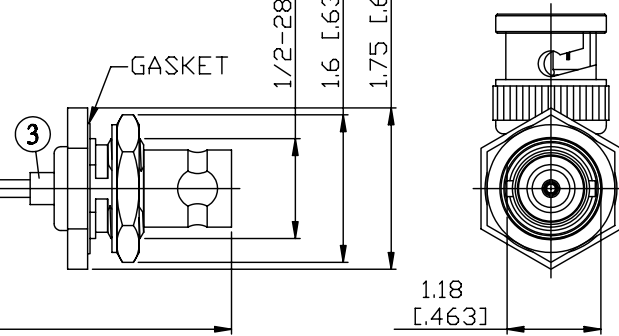


2

3

L

JYE BAO P/N	L CM (INCH)
B39B85-85T-15	15 (5.906)
B39B85-85T-30	30 (11.811)
B39B85-85T-50	50 (19.685)
B39B85-85T-100	100 (39.370)
B39B85-85T-150	150 (59.055)
B39B85-85T-200	200 (78.740)
B39B85-85T-XXX	CUSTOM LENGTH IN CM



MOUNTING HOLE

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY BNC PLUG R/A TO BNC JACK FOR BULKHEAD
	JYE BAO DRAWING NO.	B39B85-85T-XXX