


NO.	COMPONENTS	IMPEDANCE
1	BNC FEMALE	50 OHM
2	DOUBLE SHIELDED RG316(= RD316)	50 OHM
3	HEAT SHRINKING TUBE	
4	BNC REVERSE POLARITY FEMALE	50 OHM

BNC FEMALE

BNC R/P FEMALE

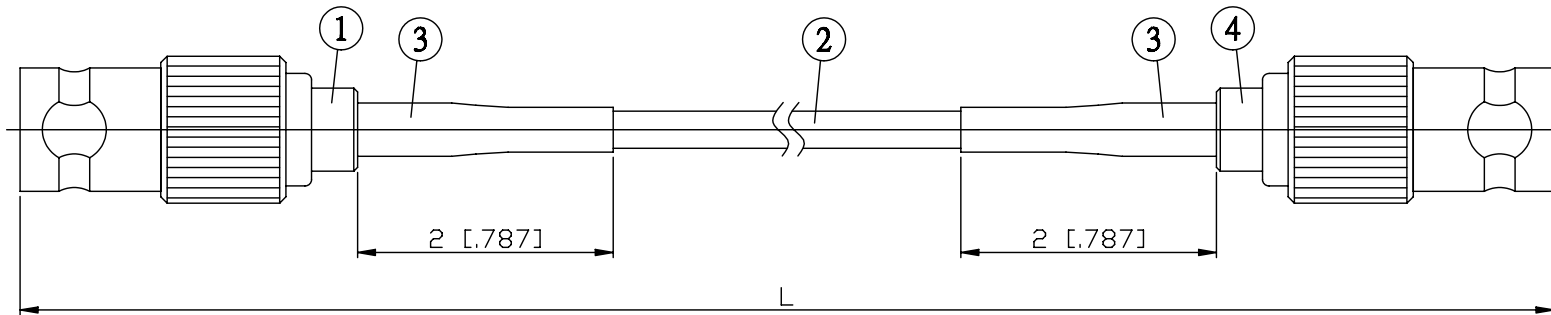

JYE BAO P/N	L CM (INCH)
B80B90-316D-15	15 (5.906)
B80B90-316D-30	30 (11.811)
B80B90-316D-50	50 (19.685)
B80B90-316D-100	100 (39.370)
B80B90-316D-150	150 (59.055)
B80B90-316D-200	200 (78.740)
B80B90-316D-XXX	CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY BNC JACK TO BNC R/P JACK
	JYE BAO DRAWING NO. B80B90-316D-XXX