



| NO. | COMPONENTS | IMPEDANCE |
|-----|--------------------------------|-----------|
| 1 | BNC FEMALE FOR BULKHEAD | 50 OHM |
| 2 | DOUBLE SHIELDED RG316(= RD316) | 50 OHM |
| 3 | HEAT SHRINKING TUBE | |
| 4 | TNC MALE RIGHT ANGLE | 50 OHM |

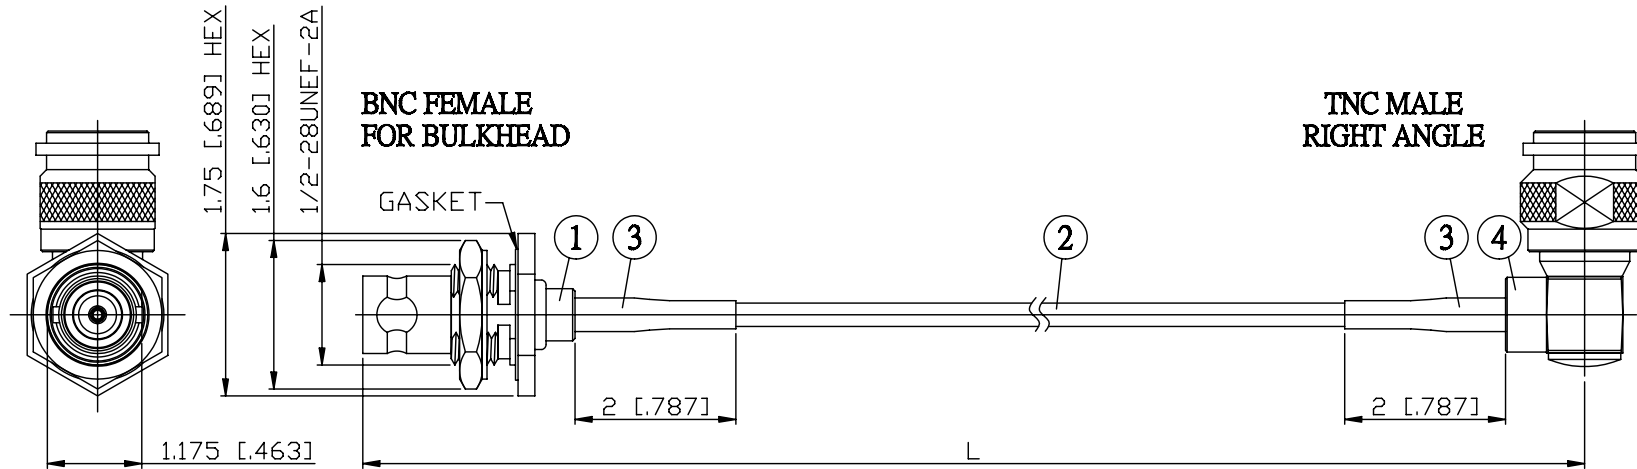

| JYE BAO P/N | L CM (INCH) |
|-----------------|------------------------|
| B85T39-316D-15 | 15 (5.906) |
| B85T39-316D-30 | 30 (11.811) |
| B85T39-316D-50 | 50 (19.685) |
| B85T39-316D-100 | 100 (39.370) |
| B85T39-316D-150 | 150 (59.055) |
| B85T39-316D-200 | 200 (78.740) |
| B85T39-316D-XXX | CUSTOM LENGTH IN CM |

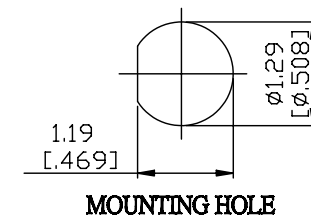

| | |
|--|---|
| LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER. | JYE BAO CO., LTD. TAIPEI TAIWAN |
| | DESCRIPTION CABLE ASSEMBLY BNC JACK FOR BULKHEAD TO TNC PLUG R/A |
| | JYE BAO DRAWING NO. B85T39-316D-XXX |