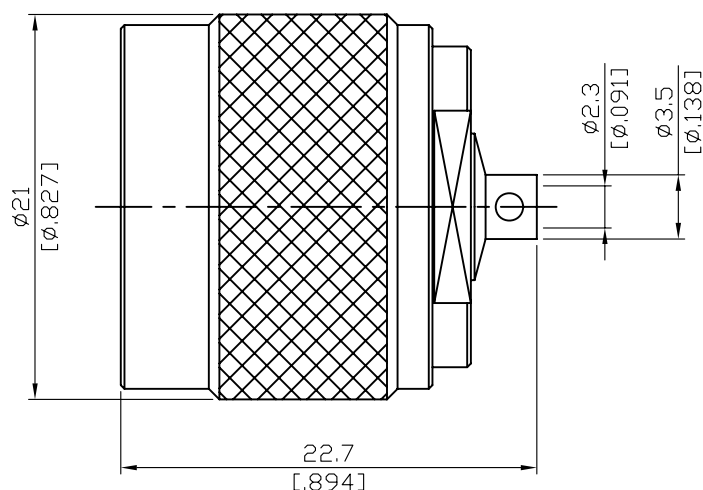


N3300-0085/11G

N Plug Solder For RG405; 11GHz VSWR 1.15

50Ω



Parts	Material	Plating (Micro-inch)
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Gasket	Silicone	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Center Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Suitable Cables: Semi-rigid.085; Conformable.085

This part number complies with RoHS.





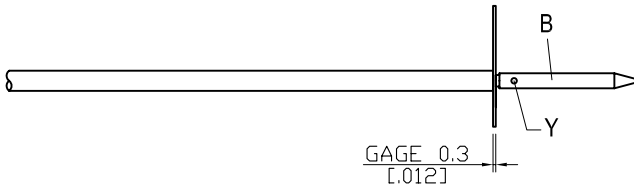
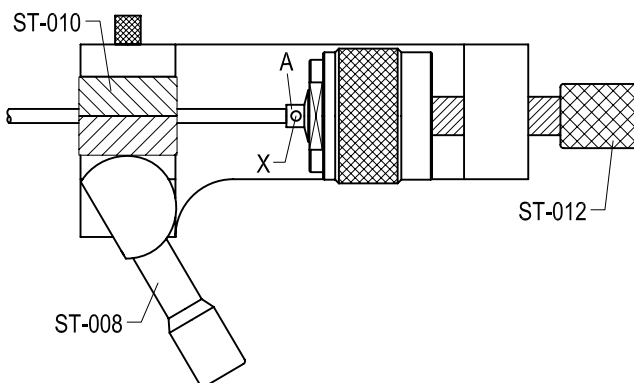
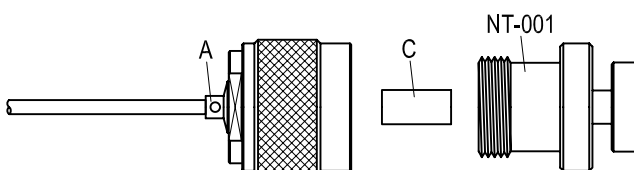
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

N	N3300-0085/11G																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 11GHz</td></tr> <tr> <td>VSWR</td><td>≤1.15 (DC to 11GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤0.05 x √f(GHz) dB</td></tr> <tr> <td>Insulation resistance</td><td>≥5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤1.5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤1mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>2500 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>1000 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 11GHz	VSWR	≤1.15 (DC to 11GHz)	Insertion loss	≤0.05 x √f(GHz) dB	Insulation resistance	≥5000MΩ	Contact resistance inner conductor	≤1.5mΩ	Contact resistance outer conductor	≤1mΩ	Dielectric withstanding voltage (at sea level)	2500 V rms	Working voltage (at sea level)	1000 V rms
Impedance	50Ω																		
Frequency range	DC to 11GHz																		
VSWR	≤1.15 (DC to 11GHz)																		
Insertion loss	≤0.05 x √f(GHz) dB																		
Insulation resistance	≥5000MΩ																		
Contact resistance inner conductor	≤1.5mΩ																		
Contact resistance outer conductor	≤1mΩ																		
Dielectric withstanding voltage (at sea level)	2500 V rms																		
Working voltage (at sea level)	1000 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>6 to 10 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>15 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥101.2 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥6.3 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥500</td></tr> </table>		Recommended coupling nut torque	6 to 10 inch lbs	Coupling proof torque	15 inch lbs	Coupling nut retention force	≥101.2 lbs	Contact captivation-axial	≥6.3 lbs	Durability (mating)	≥500								
Recommended coupling nut torque	6 to 10 inch lbs																		
Coupling proof torque	15 inch lbs																		
Coupling nut retention force	≥101.2 lbs																		
Contact captivation-axial	≥6.3 lbs																		
Durability (mating)	≥500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Soldering gauge 0.3mm thick</td><td>ST-0.3</td></tr> <tr> <td>Soldering fixture</td><td>ST-008</td></tr> <tr> <td>Insert for .141inch semi-rigid cable</td><td>ST-010</td></tr> <tr> <td>Locator tool</td><td>ST-012</td></tr> <tr> <td>Dielectric insertion tool</td><td>NT-001</td></tr> </table>		Soldering gauge 0.3mm thick	ST-0.3	Soldering fixture	ST-008	Insert for .141inch semi-rigid cable	ST-010	Locator tool	ST-012	Dielectric insertion tool	NT-001								
Soldering gauge 0.3mm thick	ST-0.3																		
Soldering fixture	ST-008																		
Insert for .141inch semi-rigid cable	ST-010																		
Locator tool	ST-012																		
Dielectric insertion tool	NT-001																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

N3300-0085/11G		DATE	2020/04/28	REV	—
A  BODY B  CONTACT PIN C  INSULATOR					
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: PUT 0.3 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ".		
			Step 3: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-010 " AND LOCATOR TOOL " ST-012 " TO FIX THE CONNECTOR. SOLDER IN " X ".		
			Step4: USE DIELECTRIC INSERTION TOOL " NT-001 " TO INSERT THE TEFLON " C ".		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	