



BT-A8A8/B8-2.5G-25

BNC Jack Bias Tee (With SMA Jack for RF In & Out) From
10MHz to 2.5GHz Rated to 1A and 25 Volts

50Ω

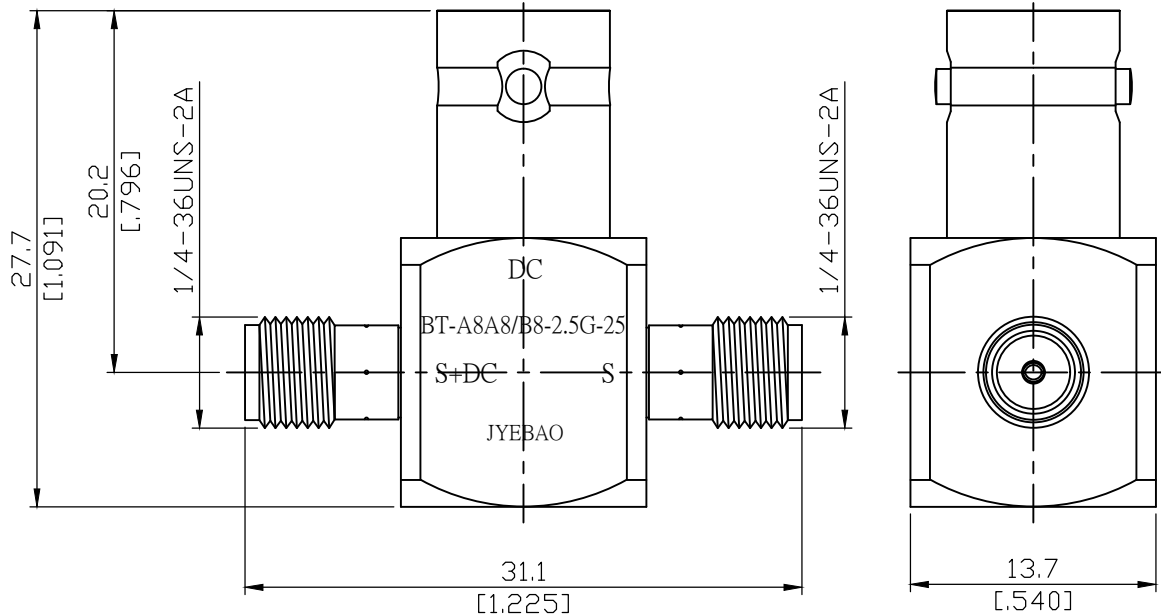

DC-BLOCK
FREQ: 10MHz-2.5GHz
IL < 0.5dB
VSWR: 1.25 : 1 MAX
DC-Current: 1A MAX
DC Voltage Maximum: 25MAX
Isolation (RF To Bias Port Typical): 25dB



Parts	Material	Plating (Micro-inch)
Cover	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin (BNC)	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin (SMA)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.