


<b>CIPS-N8N8-A</b>	<b>N Jack To N Jack Constant Impedance Phase Shifter</b>	<b>50Ω</b>
--------------------	--	------------

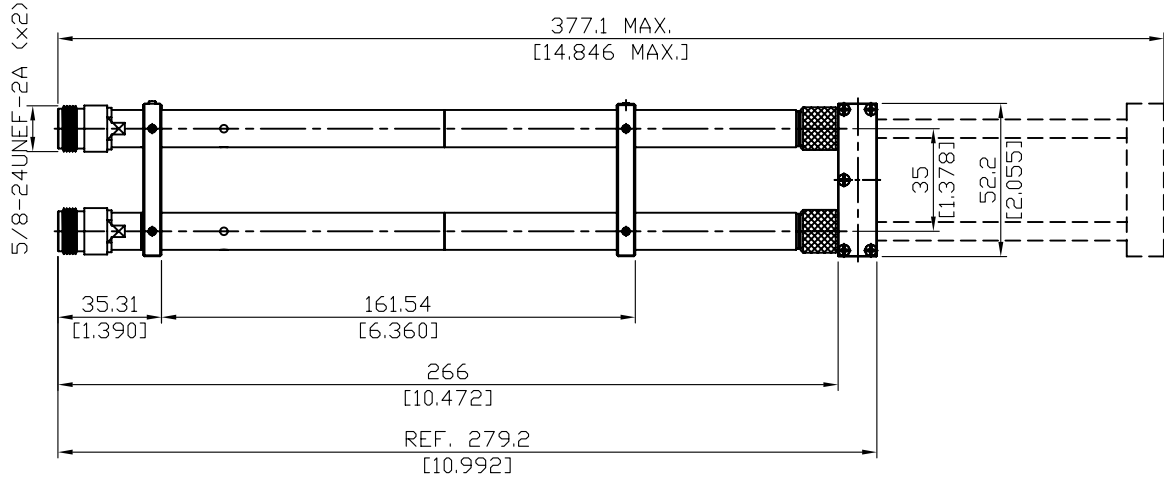

**Specification:**

Frequency range min.: 100 to 350MHz  
 Impedance: 50ohms  
 Max. VSWR: 1.10 : 1  
 Power rating (Average): 100 Watts  
 Power rating (Peak): 1 Kilowatt  
 Delta phase: 0° to 80°  
 Insertion Loss: < 0.15dB

**Note:**

S22 test report from 10MHz to 350MHz,  
 Measured under maximum extension,  
 To be send along with each piece

Parts	Material	Plating ( Micro-inch )
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Screw	Iron	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Housing	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.