


| NO. | COMPONENTS | IMPEDANCE |
|-----|--------------------------------|-----------|
| 1 | MCX FEMALE | 50 OHM |
| 2 | DOUBLE SHIELDED RG316(= RD316) | 50 OHM |
| 3 | HEAT SHRINKING TUBE | |

MCX FEMALE

MCX FEMALE

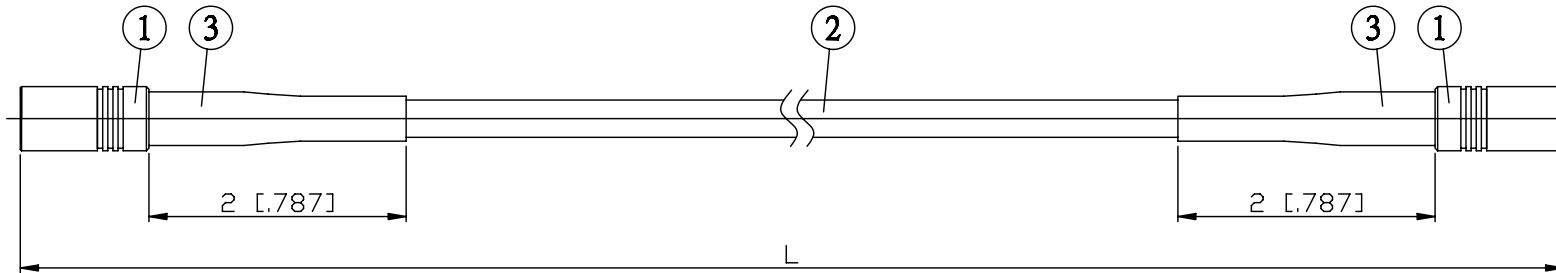

| JYE BAO P/N | L CM (INCH) |
|-----------------|------------------------|
| D80D80-316D-15 | 15 (5.906) |
| D80D80-316D-30 | 30 (11.811) |
| D80D80-316D-50 | 50 (19.685) |
| D80D80-316D-100 | 100 (39.370) |
| D80D80-316D-150 | 150 (59.055) |
| D80D80-316D-200 | 200 (78.740) |
| D80D80-316D-XXX | CUSTOM LENGTH IN CM |

| | |
|--|--|
| <p>LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.</p> | <p>JYE BAO CO., LTD. TAIPEI TAIWAN</p> |
| | <p>DESCRIPTION CABLE ASSEMBLY MCX JACK TO MCX JACK</p> |
| | <p>JYE BAO DRAWING NO. D80D80-316D-XXX</p> |