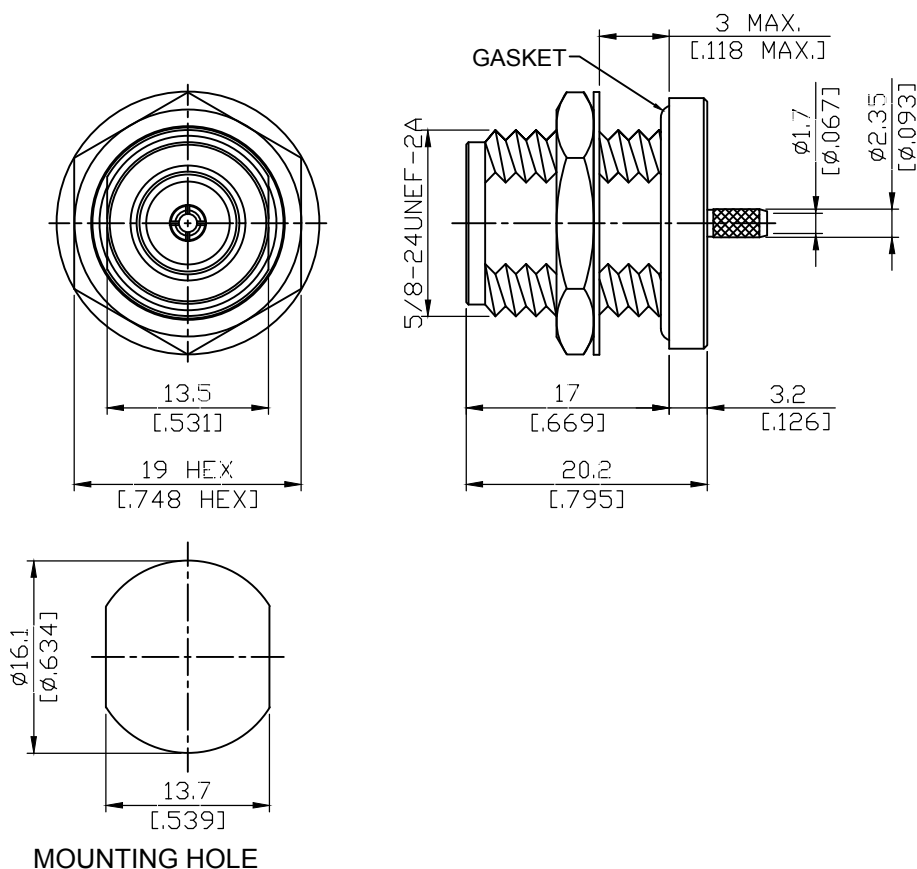


N8105P1-L100

N Jack Crimp Bulkhead For JBY100,LMR100 50Ω



Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Suitable Cables: JBY100, LMR100




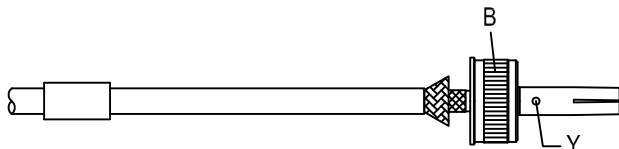
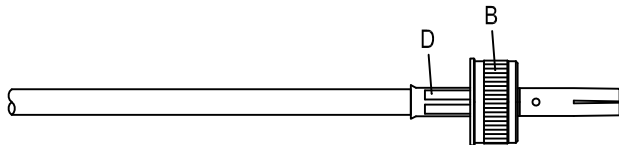
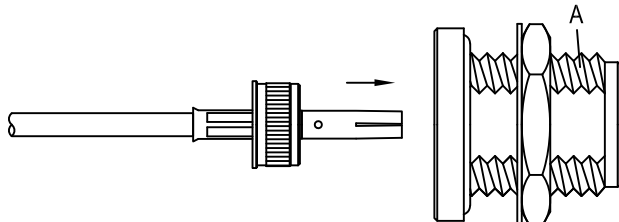
IP67 (Mated)

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY RECOMMENDATION

N8105P1-L100		DATE	2019/03/26	REV	A
A	B	C	D		
					
BODY + LOCK WASHER + GASKET + HEX NUT	CONTACT PIN + INSULATOR + BARREL	INSULATOR	FERRULE		
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE FERRULE " D " AND INSULATOR " C " OVER CABLE.			
		Step 3: LOOSEN BRAIDING AND SLIDE BARREL " B " IN PLACE AND SOLDER IN " Y ".			
		Step 4: SLIDE FERRULE " D " TOWARDS THE BARREL " B " AND CRIMP. (USE 3.3mm/0.130inch HEX SECTION OF INSERT-A)			
		Step 6: PRESS FIT CABLE INTO CONNECTOR BODY " A ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	