


DC-AMTM0/3G100V50

SMA Plug To TNC Plug 100 Volt DC-Block

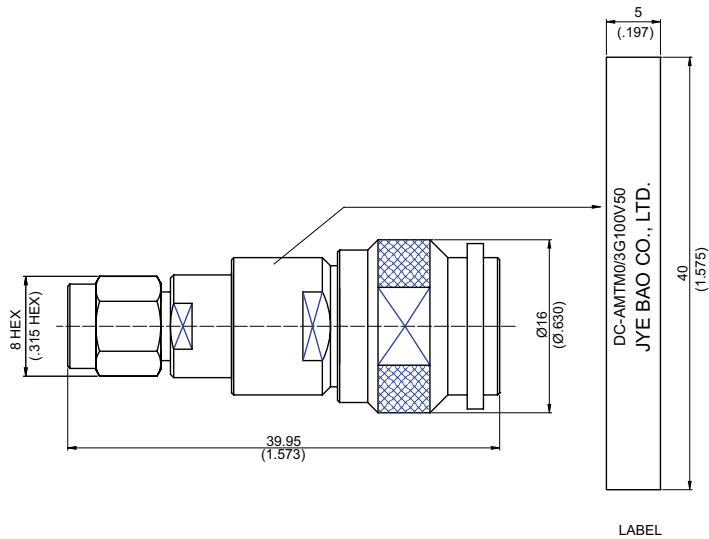

| Connector 1 | | Connector 2 | | Frequency | Impedance | Voltage | | | VSWR | | Attenuation (dB) | |
|-------------|-----------------|-------------|-----------------|-----------------|-----------|---------|-------|------|------|------|------------------|--|
| Series | Male/ Female | Series | Male/ Female | | | V | 1G | 3G | 1G | 3G | | |
| SMA | Male | TNC | Male | 10 MHz to 3 GHz | 50Ω | 100V DC | ≤1.12 | ≤1.2 | ≤0.1 | ≤0.2 | | |

| Parts | Material | Plating (Micro-inch) |
|----------------|------------------|--|
| Retaining Ring | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Gasket | Silicon | |
| Contact Pin | Phosphor Bronze | Gold 20 Over Nickel 50 Over Copper 50 |
| Insulator | Teflon | |
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Retaining Ring | Beryllium Copper | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.