


DC-BFTM0/3G50V50

BNC Jack To TNC Plug 50 Volt DC-Block

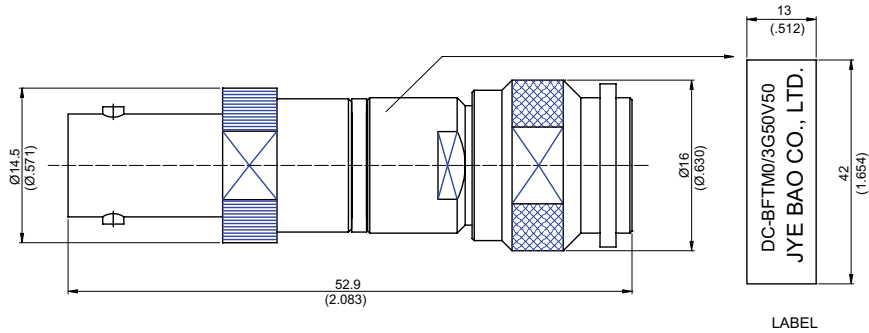

| Connector 1 |                 | Connector 2 |                 | Frequency       | Impedance | Voltage | VSWR  |      | Attenuation (dB) |      |
|-------------|-----------------|-------------|-----------------|-----------------|-----------|---------|-------|------|------------------|------|
| Series      | Male/<br>Female | Series      | Male/<br>Female |                 |           | V       | 1G    | 3G   | 1G               | 3G   |
| BNC         | Female          | TNC         | Male            | 10 MHz to 3 GHz | 50Ω       | 50V DC  | ≤1.12 | ≤1.2 | ≤0.1             | ≤0.2 |

| Parts         | Material        | Plating (Micro-inch)                     |
|---------------|-----------------|------------------------------------------|
| Contact Pin   | Phosphor Bronze | Gold 20 Over Nickel 50 Over Copper 50    |
| Retainer Ring | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Gasket        | Silicon         |                                          |
| Insulator     | Teflon          |                                          |
| Body          | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |
| Coupling Nut  | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50 |

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.