


DC-BMBF0/3G50V75

BNC Plug To Jack 50 Volt DC-Block

75Ω

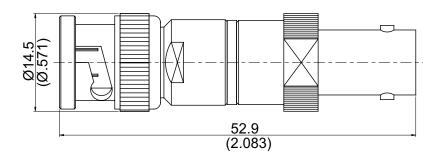

| Connector 1 | | Connector 2 | | | | Voltage | VSWR | Attenuation (dB) |
|-------------|--------|-------------|--------|---------------|-----------|---------|-------|------------------|
| Series | Male/ | Series | Male/ | Frequency | Impedance | V | 3G | 3G |
| | Female | | Female | | | | | |
| BNC | Male | BNC | Female | 10MHz To 3GHz | 75Ω | 50 | ≤1.25 | ≤0.2 |

| Parts | Material | Plating (Micro-inch) | | | |
|--------------|-----------------|---|--|--|--|
| Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | |
| Contact Body | Brass | Tin-Zinc-Copper-Alloy 100 Over Copper 50 | | | |
| Contact Pin | Brass | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 | | | |
| Insulator | Teflon | | | | |
| Contact Pin | Phosphor Bronze | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 | | | |
| Gasket | Silicone | | | | |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.