


DC-DMDF0/6G50V50

MCX Plug To MCX Jack DC-BLOCK 6GHz 50Ω

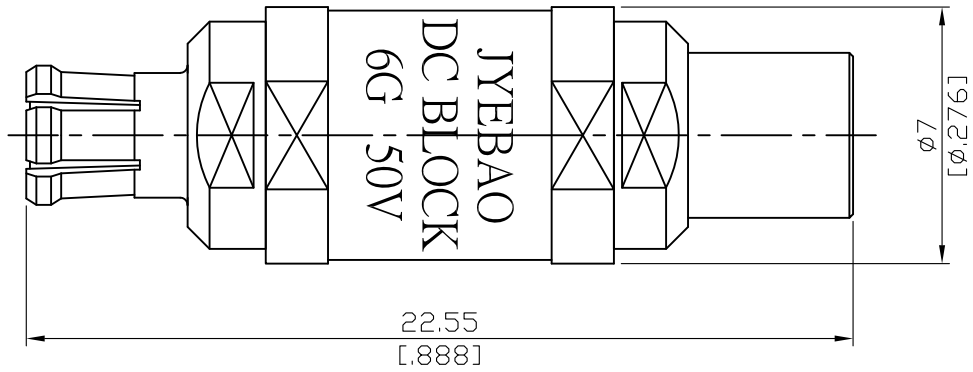

NOTES:

1. IMPEDANCE: 50Ω
2. VOLTAGE: 50V
3. FREQUENCY: 10MHz TO 6GHz
4. VSWR: 1GHz \leq 1.12
6GHz \leq 1.2
5. ATTENUATION: \leq 0.5dB

Parts	Material	Plating (Micro-inch)
Contact Pin (Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin (Plug)	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body (Plug)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body (Jack)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

DC-DMDF0-6G50V50

