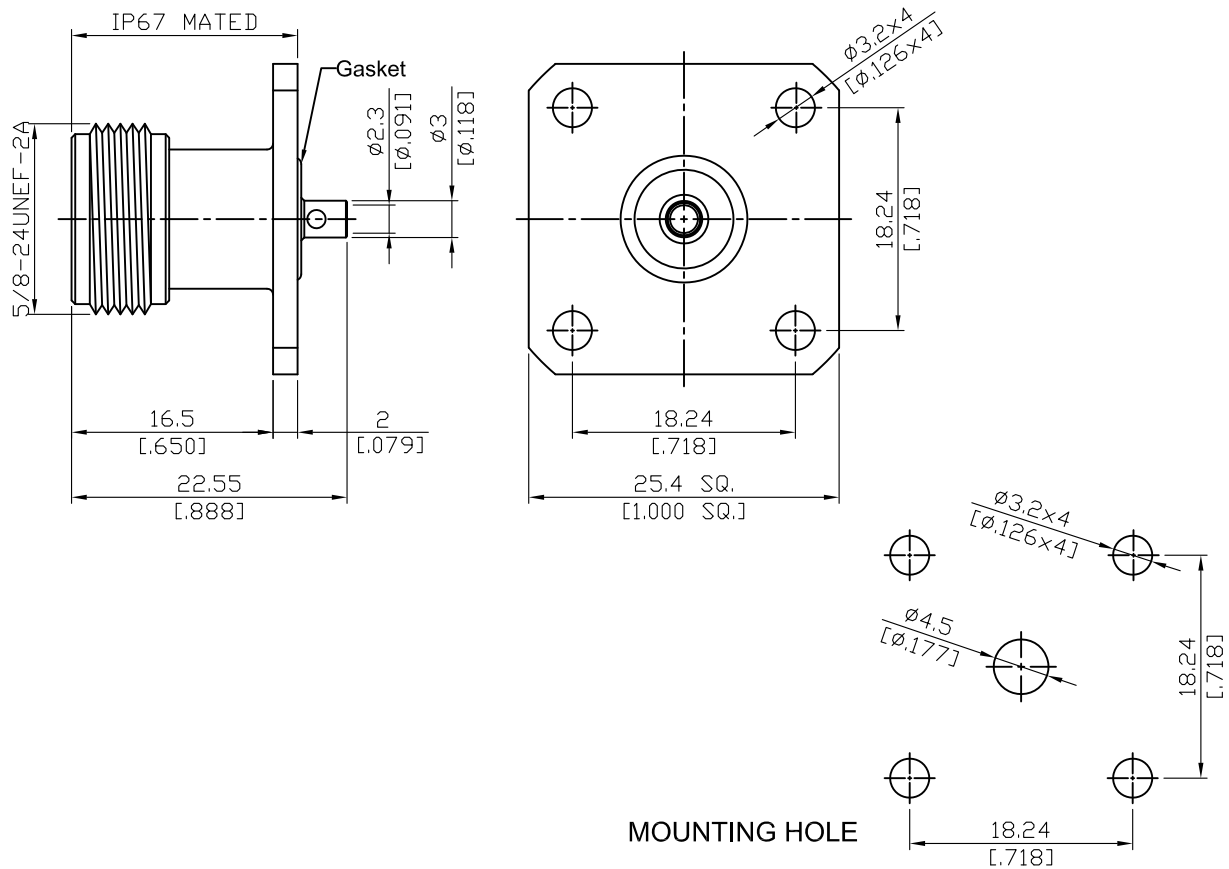


N8346-0085/LP

Low Pim N Jack Solder 4 Hole Flange
For RG405; IP67 Mated; 11GHz VSWR 1.2 50Ω



Parts	Material	Plating (Micro-inch)
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Suitable Cables: .085 Semi-Rigid, .085 Formable, RG405

This part number complies with RoHS.



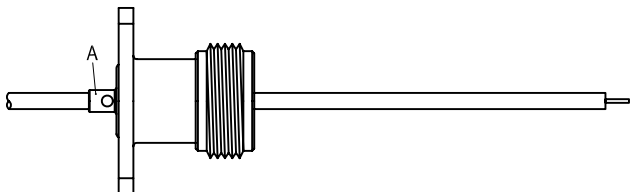
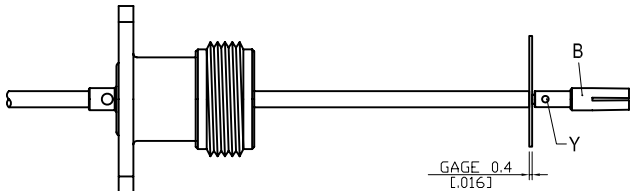
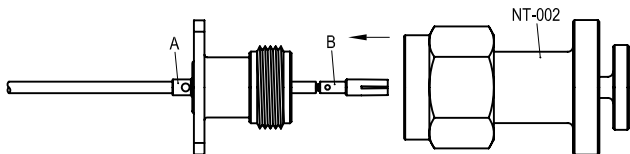
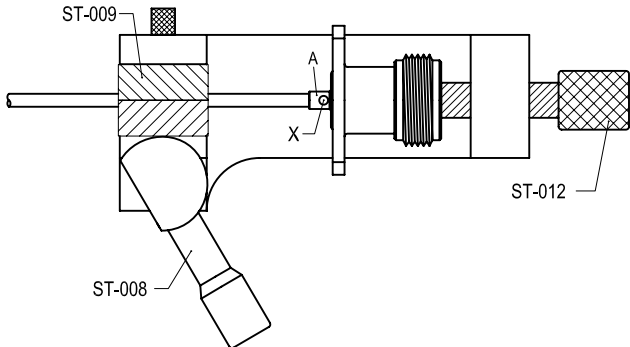
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

N		N8346-0085/LP	
Interface		MIL-STD-348B	
Electrical Data		Impedance 50Ω Frequency range DC to 11GHz VSWR ≤ 1.2 (DC to 11GHz) Insertion loss $\leq 0.05 \times \sqrt{f(\text{GHz})}$ dB Insulation resistance $\geq 5000\text{M}\Omega$ Contact resistance inner conductor $\leq 1.5\text{m}\Omega$ Contact resistance outer conductor $\leq 1\text{m}\Omega$ Dielectric withstanding voltage (at sea level) 2500 V rms Working voltage (at sea level) 1000 V rms Intermodulation $\geq 160\text{dBC}$	
Mechanical Data		Recommended coupling nut torque 6 to 10 inch lbs Coupling proof torque 15 inch lbs Contact captivation-axial ≥ 6.3 lbs Durability (mating) ≥ 500	
Environmental Data		Temperature range -65°C to +165°C Thermal shock MIL-STD-202, Method 107, Condition B Moisture resistance MIL-STD-202, Method 106 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	
Tooling		Soldering gauge ST-0.4 Soldering fixture ST-008 Locator tool ST-012 Insert for .085 semi-rigid cable ST-009 Insertion tool for N jack contact pin NT-002	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

N8346-0085/LP		DATE	2016/07/20	REV	—
A		B			
					
BODY + GASKET		CONTACT PIN			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE CONNECTOR " A " OVER CABLE.			
		Step 3: PUT 0.4 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ".			
		Step 4: USE FIXTURE " NT-002 " TO INSERT CONTACT PIN " B " INTO THE CONNECTOR BODY " A ".			
		Step 5: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-012 " TO FIX THE CONNECTOR. SOLDER IN " X ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

N8346-0085/LP

