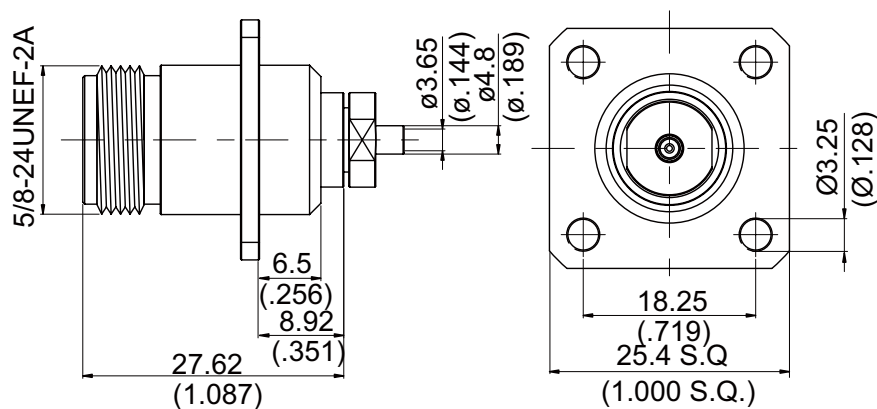


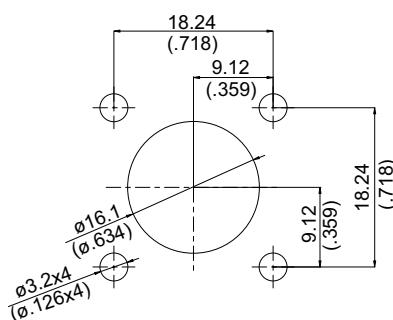
N8346P-0141

N Jack Solder SQ 25.4mm 4 Hole Flange
For RG402; 11GHz VSWR 1.2

50Ω



MOUNTING HOLE



Parts	Material	Plating (Micro-inch)
Solder Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 41.1 g

Suitable Cables: Semi-rigid.141

This part number complies with RoHS.






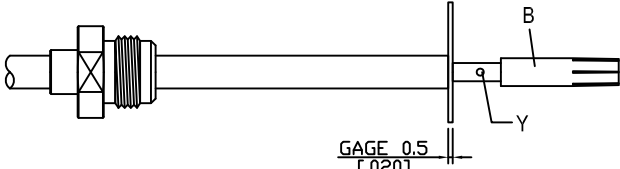
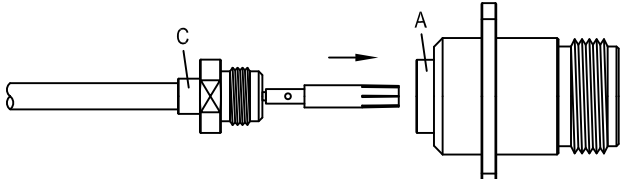
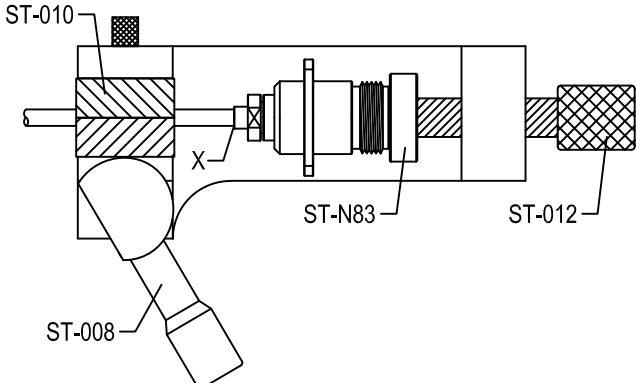
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

N	N8346P-0141																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 11GHz</td></tr> <tr> <td>VSWR</td><td>≤1.2 (DC to 11GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤0.05 x √f(GHz) dB</td></tr> <tr> <td>Insulation resistance</td><td>≥5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤1.5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤1mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>2500 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>1000 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 11GHz	VSWR	≤1.2 (DC to 11GHz)	Insertion loss	≤0.05 x √f(GHz) dB	Insulation resistance	≥5000MΩ	Contact resistance inner conductor	≤1.5mΩ	Contact resistance outer conductor	≤1mΩ	Dielectric withstanding voltage (at sea level)	2500 V rms	Working voltage (at sea level)	1000 V rms
Impedance	50Ω																		
Frequency range	DC to 11GHz																		
VSWR	≤1.2 (DC to 11GHz)																		
Insertion loss	≤0.05 x √f(GHz) dB																		
Insulation resistance	≥5000MΩ																		
Contact resistance inner conductor	≤1.5mΩ																		
Contact resistance outer conductor	≤1mΩ																		
Dielectric withstanding voltage (at sea level)	2500 V rms																		
Working voltage (at sea level)	1000 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>6 to 10 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>15 inch lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥6.3 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥500</td></tr> </table>		Recommended coupling nut torque	6 to 10 inch lbs	Coupling proof torque	15 inch lbs	Contact captivation-axial	≥6.3 lbs	Durability (mating)	≥500										
Recommended coupling nut torque	6 to 10 inch lbs																		
Coupling proof torque	15 inch lbs																		
Contact captivation-axial	≥6.3 lbs																		
Durability (mating)	≥500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Soldering gauge</td><td>ST-0.5</td></tr> <tr> <td>Locator tool</td><td>ST-011, ST-N83</td></tr> <tr> <td>Soldering fixture</td><td>ST-008</td></tr> <tr> <td>Insert .141 semi-rigid cable</td><td>ST-010</td></tr> </table>		Soldering gauge	ST-0.5	Locator tool	ST-011, ST-N83	Soldering fixture	ST-008	Insert .141 semi-rigid cable	ST-010										
Soldering gauge	ST-0.5																		
Locator tool	ST-011, ST-N83																		
Soldering fixture	ST-008																		
Insert .141 semi-rigid cable	ST-010																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

N8346P-0141		DATE	2021/01/15	REV	—
A  BODY B  CONTACT PIN C  SOLDER NUT					
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE SOLDER NUT " C " OVER CABLE.			
		Step 3: PUT 0.5 MM GAGE ST-0.5 IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ".			
		Step 4: SCREW SOLDER NUT " C " ON THE CONNECTOR BODY " A ".			
		Step 6: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-010 " AND LOCATOR TOOL " ST-011 " AND " ST-N83 "TO THE CONNECTOR. SOLDER IN " X ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

Albert

N8346P-0141

S11

