


DCF-T3G2W0.1A100V2	2dB 50Ω TNC Plug/Jack DC Bias Passing Attenuator 3GHz VSWR 1.35 Rated 100V & 100mA	50Ω
--------------------	---	-----

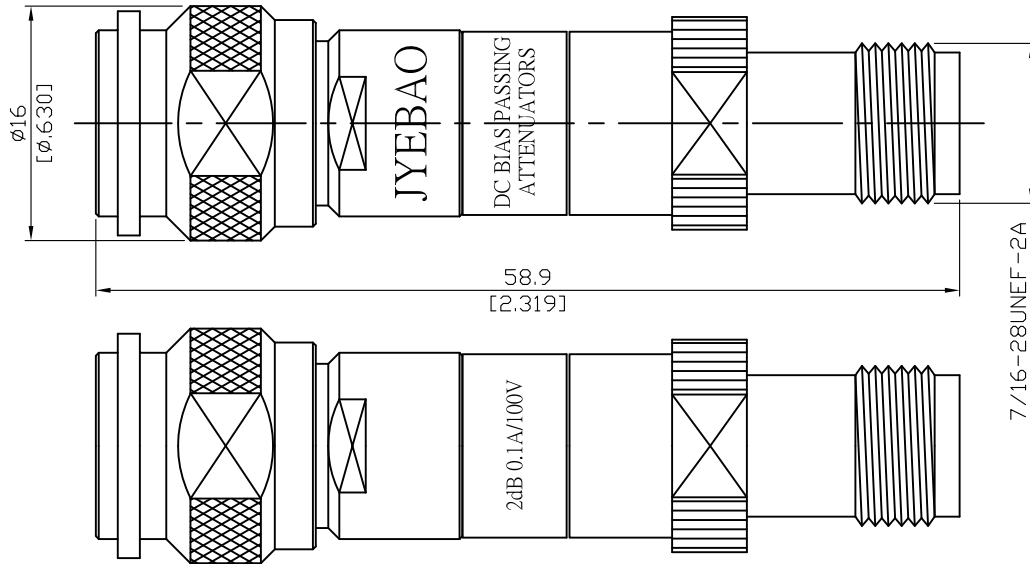

Frequency Range: 100MHz-3GHz
 Attenuation: 2dB
 Attenuation accuracy: ± 2.5 dB
 Impedance: 50ohm
 VSWR 1.35 : 1 Max
 Voltage Rating: 100V Max
 DC Current: 100mA Max
 RF Power (Average): 2W
 Operating Temp Range: -50°C/+80°C

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Contact Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

--	--