


DCS-AMAF18G200V50

SMA Plug To SMA Jack DC Block Inner
From 10MHz to 18GHz rated 200Volt

50Ω

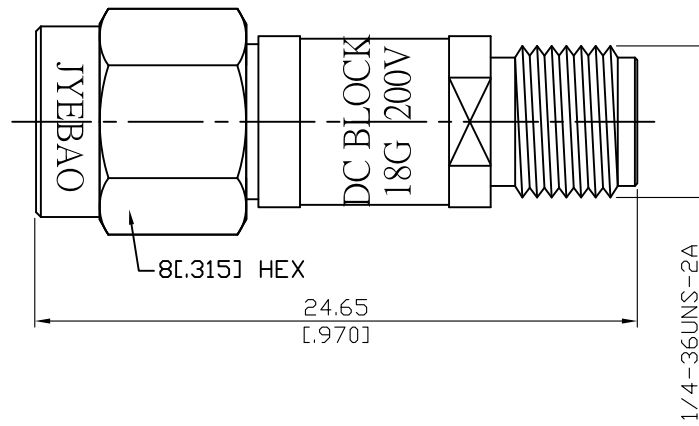

Connector 1		Connector 2		Frequency	Impedance	Voltage (V)	VSWR	Attenuation(dB)
Series	Male / Female	Series	Male / Female				18G	18G
SMA	Male	SMA	Female	10MHz to 18GHz	50Ω	200V DC	≤ 1.35	≤ 0.6

Parts	Material	Plating (Micro-inch)
Body	Stainless Steel	Passivated
Contact Pin (Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin (Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Gasket	Silicone	
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

DCS-AMAF18G200V50

