


DCS-FMFF3G200V75

F Plug To F Jack DC Block Inner  
From 10MHz to 3GHz rated 200Volt

75Ω

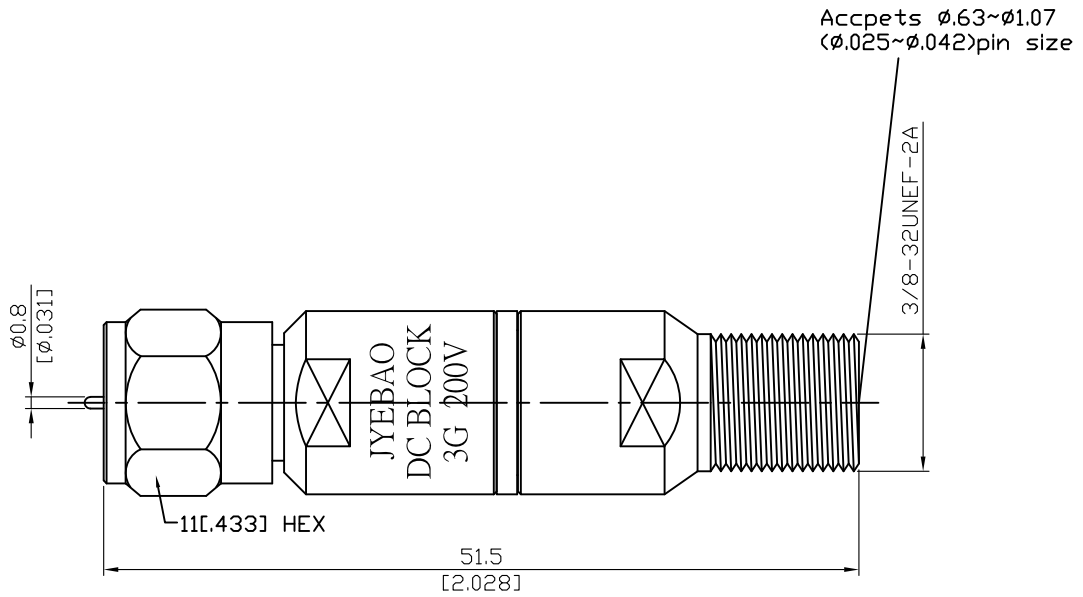

Connector 1		Connector 2		Frequency	Impedance	Voltage (V)	VSWR		Attenuation(dB)	
Series	Male / Female	Series	Male / Female				3G	3G		
F	Male	F	Female	10MHz to 3GHz	75Ω	200V DC	≤ 1.35	≤ 0.5		

Parts	Material	Plating ( Micro-inch )
Contact Pin (Plug)	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin (Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PE & PTFE	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.