


DCS-NMNF18G200V50	N Plug To N Jack DC Block Inner From 50MHz to 18GHz rated 200Volt	50Ω
-------------------	--	-----

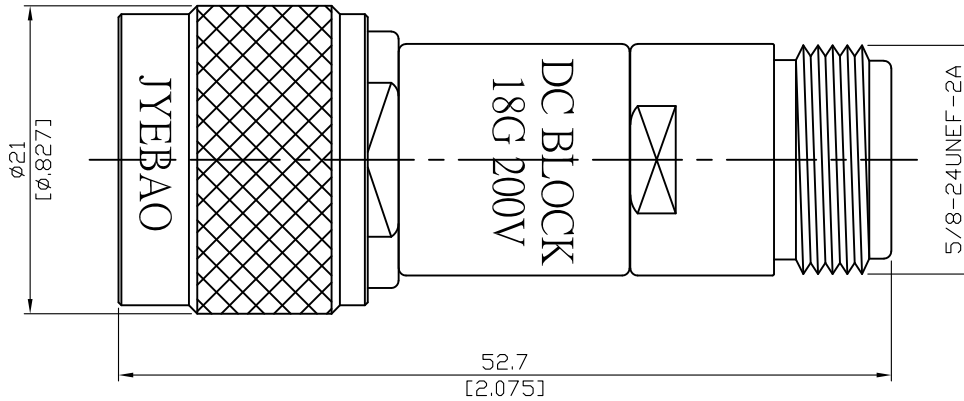

Connector 1		Connector 2		Frequency	Impedance	Voltage (V)	VSWR		Attenuation(dB)	
Series	Male / Female	Series	Male / Female				18G	18G		
N	Male	N	Female	50MHz to 18GHz	50Ω	200V DC	≤ 1.35		≤ 0.75	

Parts	Material	Plating (Micro-inch)
Coupling Nut	Stainless Steel	Passivated
Contact Pin (Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin (Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Stainless Steel	Passivated

Weight: 70.84 g	
-----------------	--

This part number complies with RoHS.
 Notice: JYEBAO reserves the right to make modifications deemed appropriate.