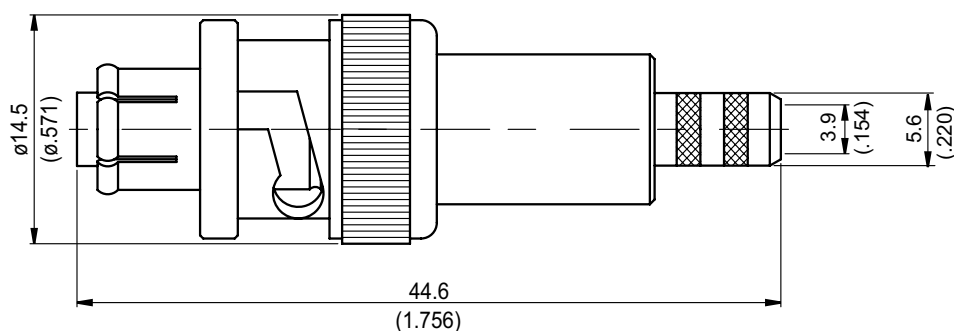


SHV3100-0059

SHV Plug Crimp For RG59

50Ω



Note: RG59 is a 75ohm cable and SHV is a 50ohm interface resulting in an impedance mismatch and poor RF performance.

Parts	Material	Plating(Micro-inch)
Barrel	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 15.23 g

Suitable Cables: RG59

This part number complies with RoHS.


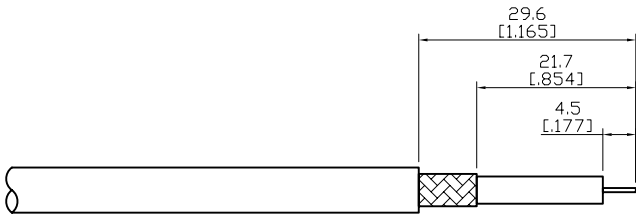
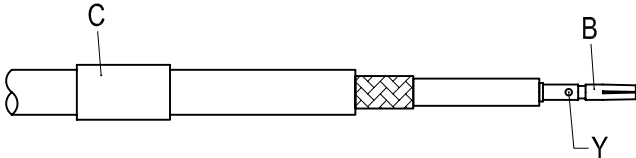
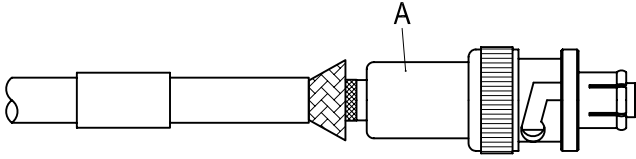
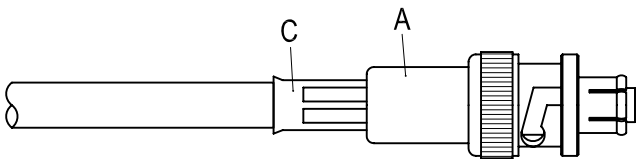
Notice: JYEBAO reserves the right to make modification deemed appropriate.

SHV	SHV3100-0059														
Interface MIL-STD-348B															
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 300 MHz</td></tr> <tr> <td>Insulation resistance</td><td>≥5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤2mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤1.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>5000 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>3500 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 300 MHz	Insulation resistance	≥5000MΩ	Contact resistance inner conductor	≤2mΩ	Contact resistance outer conductor	≤1.5mΩ	Dielectric withstanding voltage (at sea level)	5000 V rms	Working voltage (at sea level)	3500 V rms
Impedance	50Ω														
Frequency range	DC to 300 MHz														
Insulation resistance	≥5000MΩ														
Contact resistance inner conductor	≤2mΩ														
Contact resistance outer conductor	≤1.5mΩ														
Dielectric withstanding voltage (at sea level)	5000 V rms														
Working voltage (at sea level)	3500 V rms														
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>0.6 to 2.5 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥101.2 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥6.1 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥500</td></tr> </table>		Recommended coupling nut torque	0.6 to 2.5 inch lbs	Coupling nut retention force	≥101.2 lbs	Contact captivation-axial	≥6.1 lbs	Durability (mating)	≥500						
Recommended coupling nut torque	0.6 to 2.5 inch lbs														
Coupling nut retention force	≥101.2 lbs														
Contact captivation-axial	≥6.1 lbs														
Durability (mating)	≥500														
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 103, Condition B</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 103, Condition B	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Temperature range	-65°C to +165°C														
Thermal shock	MIL-STD-202, Method 107, Condition B														
Moisture resistance	MIL-STD-202, Method 103, Condition B														
Corrosion	MIL-STD-202, Method 101, Condition B														
RoHS	Compliant														
Tooling <table> <tr> <td>Crimping tool</td><td>CRT-1 or CRT-2</td></tr> <tr> <td>Crimp insert</td><td>INSERT-E</td></tr> </table>		Crimping tool	CRT-1 or CRT-2	Crimp insert	INSERT-E										
Crimping tool	CRT-1 or CRT-2														
Crimp insert	INSERT-E														

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SHV3100-0059		DATE	2016/08/22	REV	—
A B C    BODYCONTACT PINFERRULE					
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y ". (USE SQUARE 1.6mm/0.063inch SECTION OF INSERT-E IF CRIMPED)		
			Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.		
			Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 6.5mm/0.256inch HEX SECTION OF INSERT-E)		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	