


F-AMAF0/1G0.5W50	50ohm SMA Plug to SMA Jack Feedthru Termination Up to 1GHz rated 0.5W	50Ω
------------------	--	-----

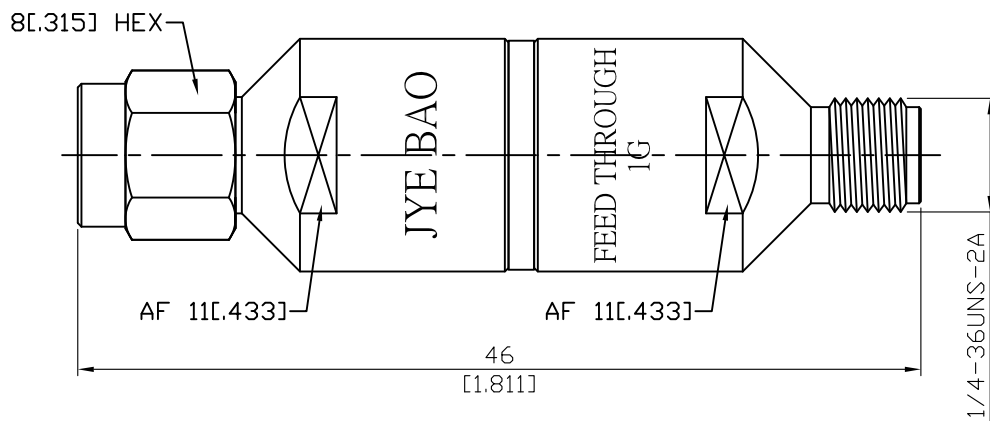

Resistance accuracy 50±0.5Ω

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR		
Series	Male / Female	Series	Male / Female				0.1G	0.5G	1G
SMA	Male	SMA	Female	1GHz	50Ω	0.5W	≤1.1	≤1.25	≤1.3

Parts	Material	Plating (Micro-inch)
Coupling Nut	Brass	Gold 5 over Nickel 50 over Copper 50
Body	Brass	Gold 5 over Nickel 50 over Copper 50
Insulator	Teflon	
Gasket	Silicone	
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Body	Brass	Gold 5 over Nickel 50 over Copper 50

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.