


F-BMBF0/1G2W75

BNC Plug To BNC Jack
Feed Through Termination

75Ω

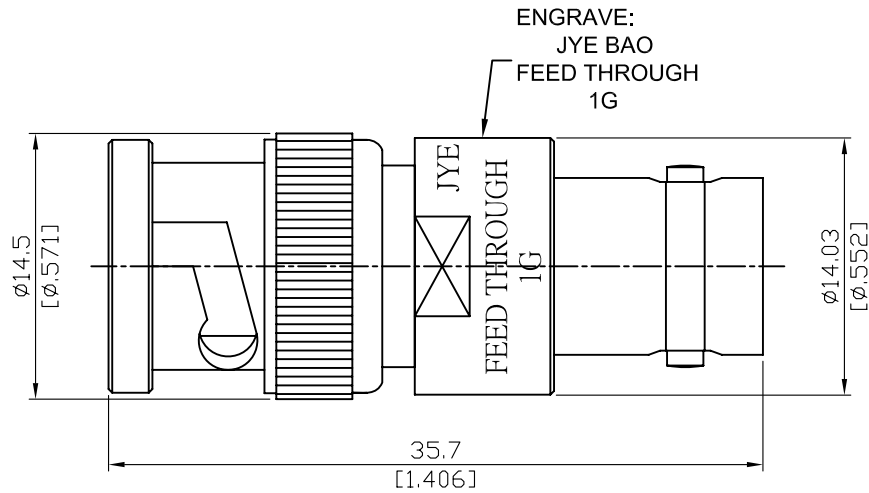

Resistance accuracy $75 \pm 0.75 \Omega$

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR(Plug Side)			VSWR(Jack Side)		
Series	Male / Female	Series	Male / Female				0.1G	0.5G	1G	0.1G	0.5G	1G
BNC	Male	BNC	Female	0 to 1GHz	75Ω	2W	≤1.1	≤1.25	≤1.3	≤1.1	≤1.25	≤1.4

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.