


F-BMBF1G2W50

BNC Plug To BNC Jack  
Feed Through Termination

50Ω

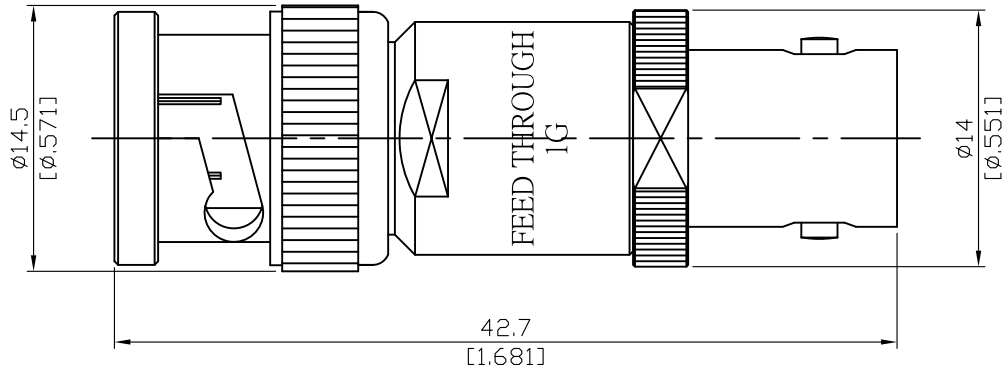

Matings  $\geq 500$

Operating Temp : -55° C / +155° C

Resistance Accuracy: 50±0.5Ω

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR		
Series	Male / Female	Series	Male / Female				0.1G	0.5G	1G
BNC	Male	BNC	Female	0 to 1GHz	50Ω	2W	≤1.1	≤1.25	≤1.3

Parts	Material	Plating ( Micro-inch )
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.