


F-NMNF0/1G0.5W50

50ohm N Plug to N Jack Feedthru Termination  
Up to 0.5GHz rated 0.5W

50Ω

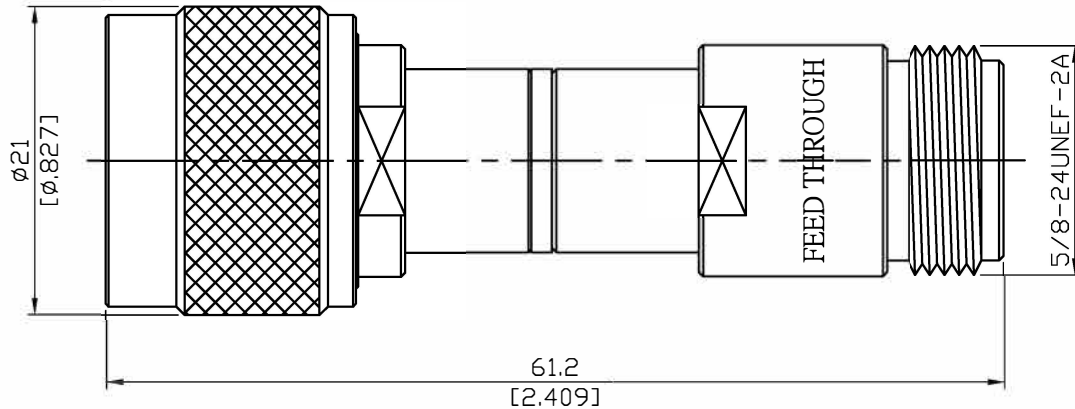

Matings  $\geq 500$   
Operating Temp : -55° C/ +155° C  
Resistance Accuracy 50±0.5Ω

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR	
Series	Male / Female	Series	Male / Female				0.1G	0.5G
N	Male	N	Female	0 to 0.5GHz	50Ω	0.5W	≤1.1	≤1.24

Parts	Material	Plating ( Micro-inch )
Insulator	Teflon	
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.