


F-NMNF0/1G0.5W75

N Plug To N Jack
Feed Through Termination

75Ω

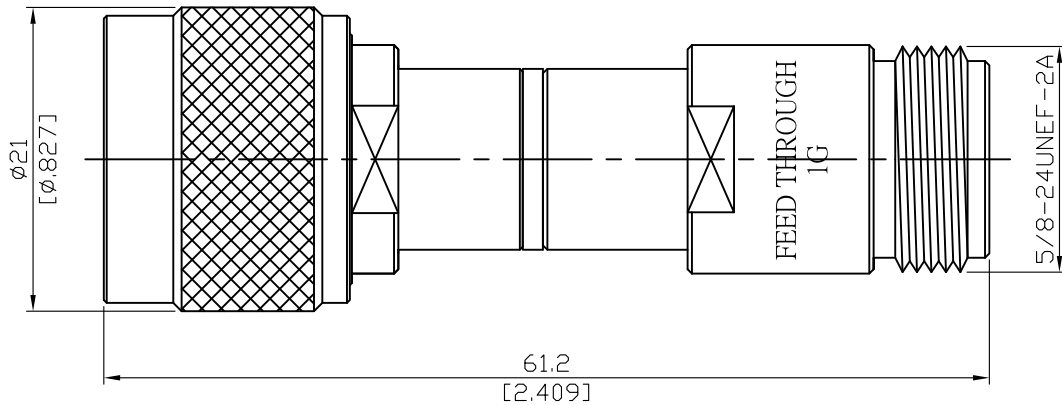

Resistance Accuracy $75 \pm 0.75 \Omega$

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR		
Series	Male / Female	Series	Male / Female				0.1G	0.5G	1G
N	Male	N	Female	0 to 1GHz	75Ω	0.5W	≤ 1.1	≤ 1.25	≤ 1.3

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.