


F-NMNF0/1G2W50

**50ohm N Plug to N Jack Feedthru Termination
Up to 0.5GHz rated 2W**

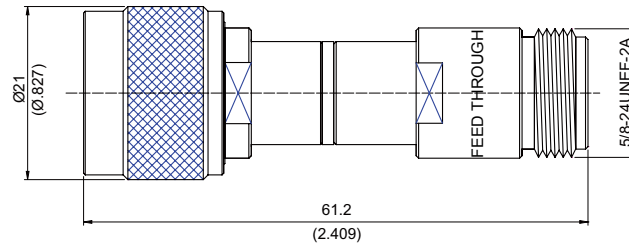

Matings ≥ 500
 Operating Temp : -55° C/ +155° C
 Resistance Accuracy: 50 \pm 0.5 Ω

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (watt)	VSWR	
Series	Male/ Female	Series	Male/ Female				0.1G	0.5G
N	Male	N	Female	0 to 0.5GHz	50 Ω	2W	≤ 1.1	≤ 1.24

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin(Jack)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin(Plug)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.