


F-NMNF0/1G2W75

N Plug To N Jack Feed Through Termination

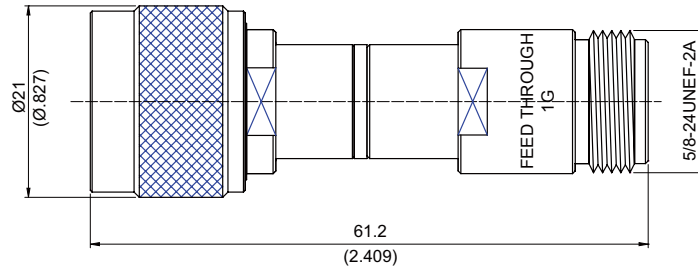

Resistance Accuracy: $75 \pm 0.75 \Omega$

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (watt)	VSWR		
Series	Male/Female	Series	Male/Female				0.1G	0.5G	1G
N	Male	N	Female	0 to 1 GHz	75Ω	2W	≤1.1	≤1.25	≤1.3

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin(Jack)	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin(Plug)	Brass	Gold 20 Over Nickel 50 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.