


NO.	COMPONENTS	IMPEDANCE
1	F MALE	75 OHM
2	6275	75 OHM
3	SLEEVE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2018/12/07	

**SUPER FLEXIBLE
TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

F MALE

F MALE

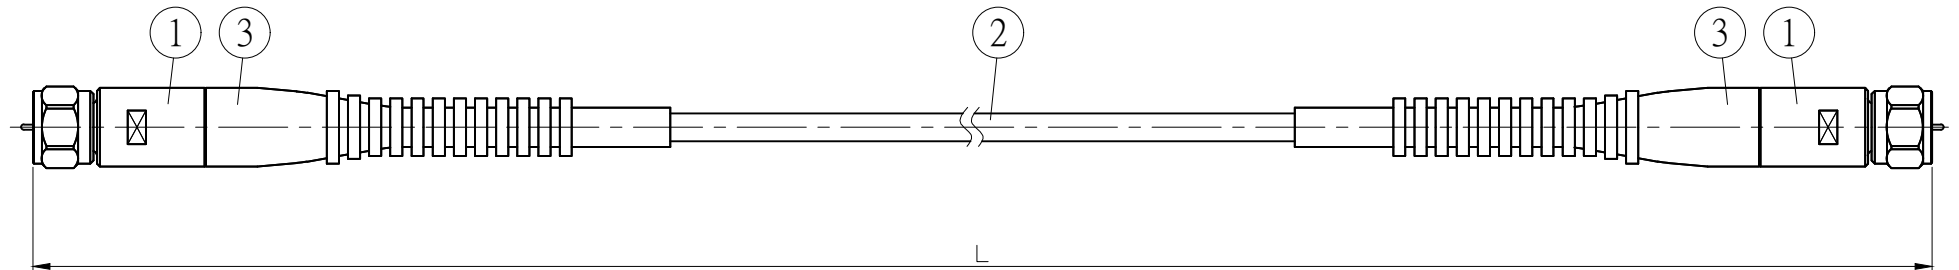

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
F30F30-6275-3GXXX	3	-20dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

※ RoHS COMPLIANT

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY F PLUG TO F PLUG

JYE BAO DRAWING NO.

F30F30-6275-3GXXX