


NO.	COMPONENTS	IMPEDANCE
1	F MALE	75 OHM
2	6275	75 OHM
3	SLEEVE	
4	N MALE	75 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2018/09/03	

SUPER FLEXIBLE TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

F MALE

N MALE

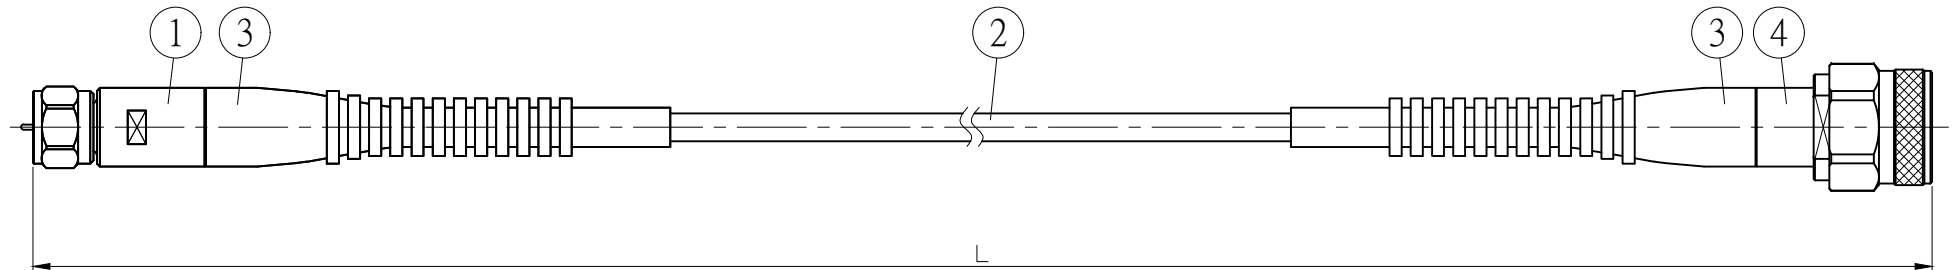

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
F30N30-6275-3GXXX	3	-20dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

※ RoHS COMPLIANT

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY F PLUG TO N PLUG

JYE BAO DRAWING NO.

F30N30-6275-3GXXX