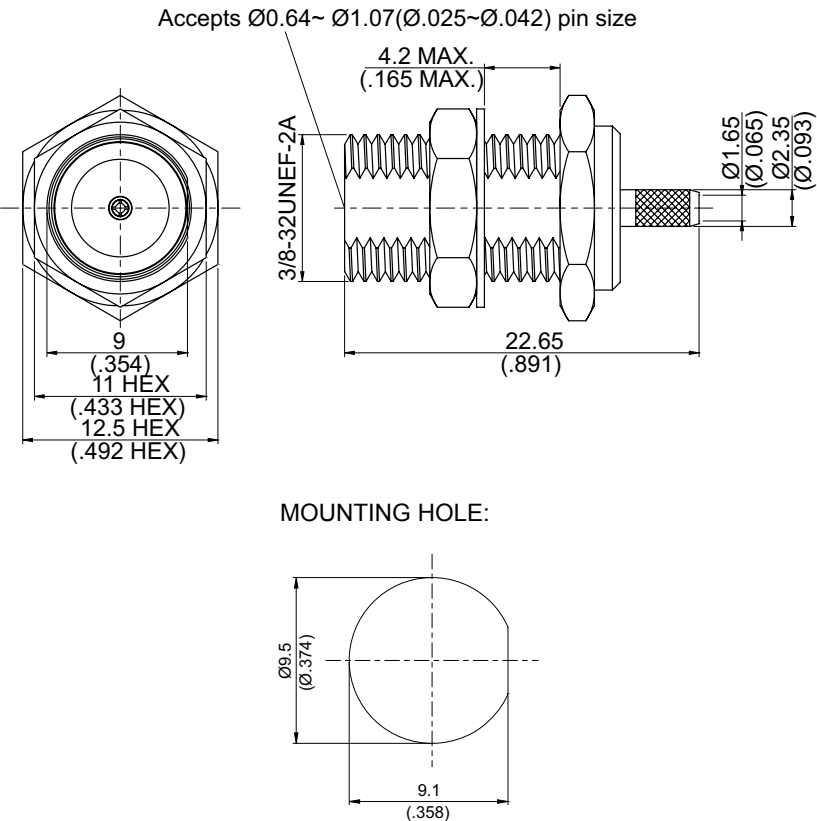


F8105D-0316	F Jack Crimp For Bulkhead (Impedance mismatch)	75Ω																								
Accepts Ø0.64~ Ø1.07(Ø.025~Ø.042) pin size  NOTE: (1) F connectors are 75 ohm. Using a 75 ohm connector on a 50 ohm cable will result in an impedance mismatch and poor RF performance.																										
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr> <tr> <td>Hex Nut</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr> <tr> <td>Lock Washer</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr> <tr> <td>Barrel</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr> <tr> <td>Insulator</td><td>P.P.</td><td></td></tr> <tr> <td>Contact Pin</td><td>Phosphor Bronze</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Body</td><td>Brass</td><td>Nickel 200 Over Copper 50</td></tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Ferrule	Brass	Nickel 200 Over Copper 50	Hex Nut	Brass	Nickel 200 Over Copper 50	Lock Washer	Brass	Nickel 200 Over Copper 50	Barrel	Brass	Nickel 200 Over Copper 50	Insulator	P.P.		Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body	Brass	Nickel 200 Over Copper 50		
Parts	Material	Plating (Micro-inch)																								
Ferrule	Brass	Nickel 200 Over Copper 50																								
Hex Nut	Brass	Nickel 200 Over Copper 50																								
Lock Washer	Brass	Nickel 200 Over Copper 50																								
Barrel	Brass	Nickel 200 Over Copper 50																								
Insulator	P.P.																									
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Body	Brass	Nickel 200 Over Copper 50																								
Weight: 7.92 g Suitable Cables: RD316,RD316-FEP																										

This part number complies with RoHS.


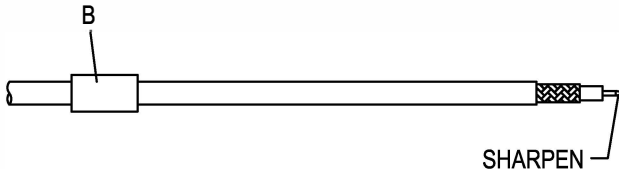
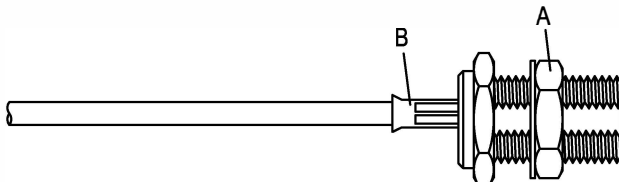
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

F	F8105D-0316																		
Interface IEC 61169-24																			
Electrical Data <table> <tr> <td>Impedance</td><td>75Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 3GHz</td></tr> <tr> <td>VSWR</td><td>Poor (Impedance mismatch)</td></tr> <tr> <td>Insertion loss</td><td>≤0.1dB at 1GHz; ≤0.2dB at 2GHz; ≤0.3dB at 3GHz</td></tr> <tr> <td>Insulation resistance</td><td>≥ 10000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤2.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>1500 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>500 V rms</td></tr> </table>		Impedance	75Ω	Frequency range	DC to 3GHz	VSWR	Poor (Impedance mismatch)	Insertion loss	≤0.1dB at 1GHz; ≤0.2dB at 2GHz; ≤0.3dB at 3GHz	Insulation resistance	≥ 10000MΩ	Contact resistance inner conductor	≤5mΩ	Contact resistance outer conductor	≤2.5mΩ	Dielectric withstanding voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms
Impedance	75Ω																		
Frequency range	DC to 3GHz																		
VSWR	Poor (Impedance mismatch)																		
Insertion loss	≤0.1dB at 1GHz; ≤0.2dB at 2GHz; ≤0.3dB at 3GHz																		
Insulation resistance	≥ 10000MΩ																		
Contact resistance inner conductor	≤5mΩ																		
Contact resistance outer conductor	≤2.5mΩ																		
Dielectric withstanding voltage (at sea level)	1500 V rms																		
Working Voltage (at sea level)	500 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>15 to 20 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>60 inch lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> <tr> <td>Accepts male pin size</td><td>Φ0.64~Φ1.07 (Φ.025~Φ.042)</td></tr> </table>		Recommended coupling nut torque	15 to 20 inch lbs	Coupling proof torque	60 inch lbs	Durability (mating)	≥ 500	Accepts male pin size	Φ0.64~Φ1.07 (Φ.025~Φ.042)										
Recommended coupling nut torque	15 to 20 inch lbs																		
Coupling proof torque	60 inch lbs																		
Durability (mating)	≥ 500																		
Accepts male pin size	Φ0.64~Φ1.07 (Φ.025~Φ.042)																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Crimping tool</td><td>CRT-1, CRT- 2</td></tr> <tr> <td>Crimp insert</td><td>INSERT-A</td></tr> </table>		Crimping tool	CRT-1, CRT- 2	Crimp insert	INSERT-A														
Crimping tool	CRT-1, CRT- 2																		
Crimp insert	INSERT-A																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

F8105D-0316		DATE	2020/11/23	REV	—
A		B			
					
BODY + HEX NUT + LOCK WASHER		FERRULE			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN. Step 2: TIN DIP.			
		Step 3: SHARPEN CENTER CONDUCTOR TIP. Step 4: SLIDE FERRULE " B " OVER CABLE.			
		Step 5: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.			
		Step 6: SLIDE FERRULE " B " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 3.3mm/0.130inch HEX SECTION OF INSERT-A)			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	