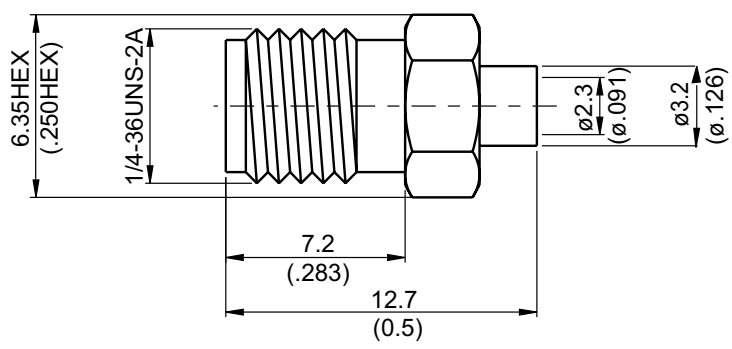


SMA8300-0085	SMA Jack Solder For RG405 27GHz VSWR 1.2	50Ω												
														
<table><tr><th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr><tr><td>Contact Pin</td><td>Beryllium Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Insulator</td><td>Teflon</td><td></td></tr><tr><td>Body</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr></table>			Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Weight: 1.52 g Suitable Cables: Semi-rigid.085														

This part number complies with RoHS.


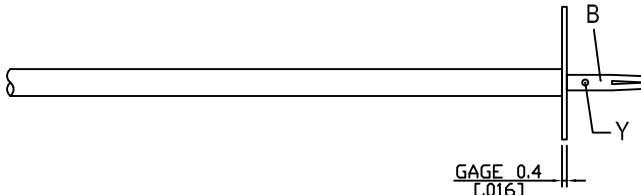
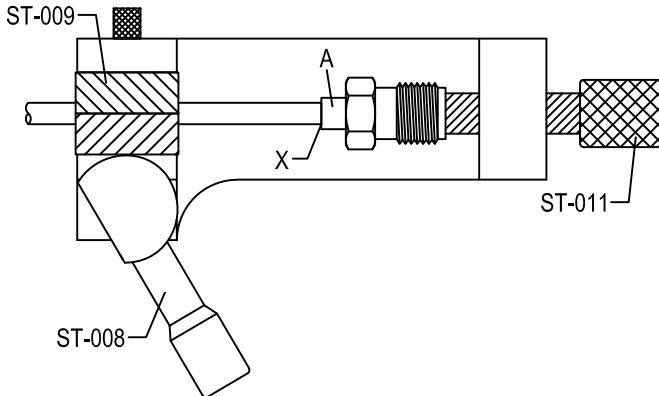
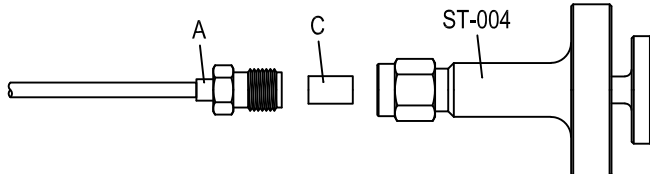
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SMA		SMA8300-0085	
Interface			
MIL-STD-348B			
Mechanically compatible with		2.92 & 3.5	
Electrical Data			
Impedance		50Ω	
Frequency range		DC to 27GHz	
VSWR		≤ 1.2 (DC to 27GHz)	
Insertion loss		≤ 0.04 x √f(GHz) dB	
Insulation resistance		≥ 5000MΩ	
Contact resistance inner conductor		≤ 3mΩ	
Contact resistance outer conductor		≤ 2mΩ	
Dielectric withstanding voltage (at sea level)		1000 V rms	
Working voltage (at sea level)		335 V rms	
Mechanical Data			
Recommended coupling nut torque		4 inch lbs	
Coupling proof torque		5.3 inch lbs	
Contact Captivation-axial		≥ 6.1 lbs	
Durability (mating)		≥ 100	
Environmental Data			
Temperature range		-65°C to +165°C	
Thermal shock		MIL-STD-202, Method 107, Condition B	
Moisture resistance		MIL-STD-202, Method 106	
Corrosion		MIL-STD-202, Method 101, Condition B	
RoHS		Compliant	
Tooling			
Soldering gauge	ST-0.4	Soldering fixture	ST-008
Locator tool	ST-011	Insert for .085 semi-rigid cable	ST-009
Dielectric insertion tool	ST-004		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SMA8300-0085		DATE	2020/08/01	REV	A
A		B		C	
					
BODY		CONTACT PIN		INSULATOR	
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: PUT 0.4 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ".		
			Step 3: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X ".		
			Step 4: USE DIELECTRIC INSERTION TOOL " ST-004 " TO INSERT THE TEFLON " C ".		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

SMA8300-0085

