

SMA9100L1-0316	SMA Reverse Polarity Jack Crimp For Bulkhead	50Ω																								
MOUNTING HOLE																										
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Brass</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Hex Nut</td><td>Brass</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Lock Washer</td><td>Brass</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Contact Pin</td><td>Brass</td><td>Gold 20 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Barrel</td><td>Brass</td><td>Gold 5 Over Nickel 50 Over Copper 50</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50	Hex Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50	Lock Washer	Brass	Gold 5 Over Nickel 50 Over Copper 50	Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50	Barrel	Brass	Gold 5 Over Nickel 50 Over Copper 50	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																								
Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50																								
Hex Nut	Brass	Gold 5 Over Nickel 50 Over Copper 50																								
Lock Washer	Brass	Gold 5 Over Nickel 50 Over Copper 50																								
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50																								
Barrel	Brass	Gold 5 Over Nickel 50 Over Copper 50																								
Insulator	Teflon																									
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Weight: Suitable Cables:RG174, RG188, RG316, RG316-FEP, RG316-LSFH																										

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

SMA9100L1-0316

JYE BAO CO., LTD.

A



BODY+HEX NUT
+LOCK WASHER

B



CONTACT PIN


C




FERRULE

DIAGRAM


ASSEMBLY INSTRUCTION

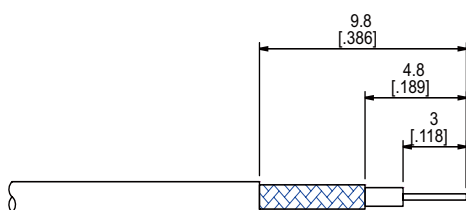


Step 1: STRIP AS SHOWN .

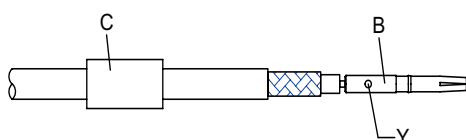

Step 2: SLIDE FERRULE " C " OVER CABLE.
Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND
SOLDER IN " Y " .

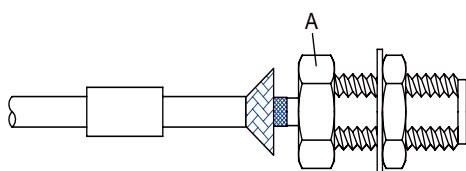

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A "
IN PLACE.

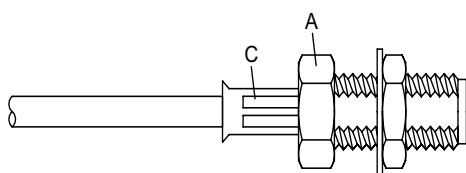

Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR
" A " AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.