


FAT-FM7FF7T1G1W10	10dB 75ohm Fixed Attenuator F Plug To F Jack 1GHz Rated 1 Watt	75Ω
-------------------	---	-----

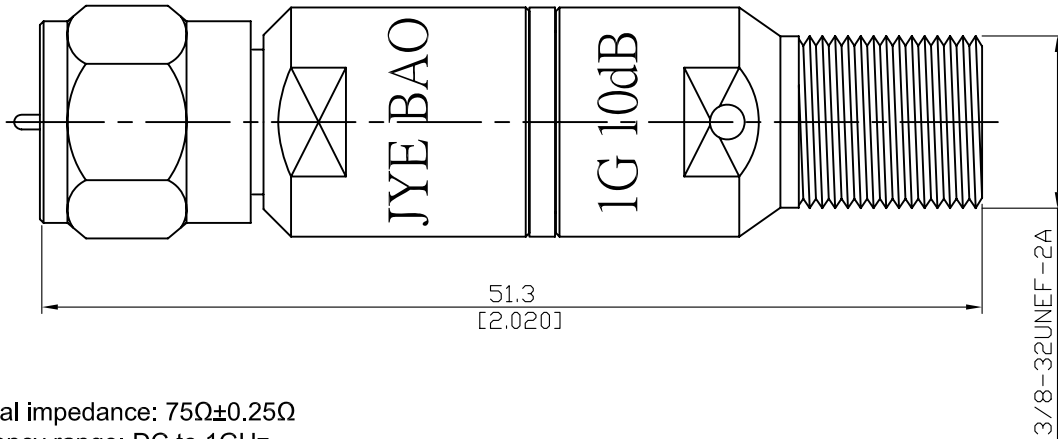

Nominal impedance: 75Ω±0.25Ω  
 Frequency range: DC to 1GHz  
 Rated Power: 250mW  
 Operating Temp range: -55 to 120C degree

Attenuation	VSWR	Attenuation deviation (±dB)
	DC~1GHz	DC~1GHz
10dB	≤1.25	±0.5dB

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

--	--

This part number complies with RoHS.  
 Notice: JYEBAO reserves the right to make modifications demand appropriate.