


FAT-FM7FF7T1G1W3

3dB 75ohm Fixed Attenuator
F Plug To F Jack 1GHz Rated 1 Watt

75Ω

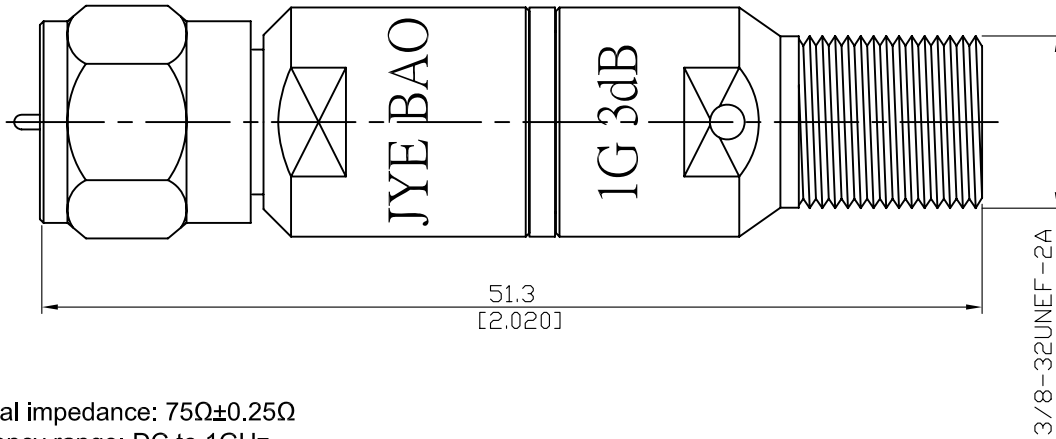

Nominal impedance: $75\Omega \pm 0.25\Omega$
 Frequency range: DC to 1GHz
 Rated Power: 250mW
 Operating Temp range: -55 to 120C degree

Attenuation	VSWR	Attenuation deviation (\pm dB)
	DC~1GHz	DC~1GHz
3dB	≤ 1.25	± 0.5 dB

Parts	Material	Plating (Micro-inch)
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.