


SMPM8300-5002

SMPM jack solder for flexible RG405;
18GHz VSWR 1.2*

50Ω

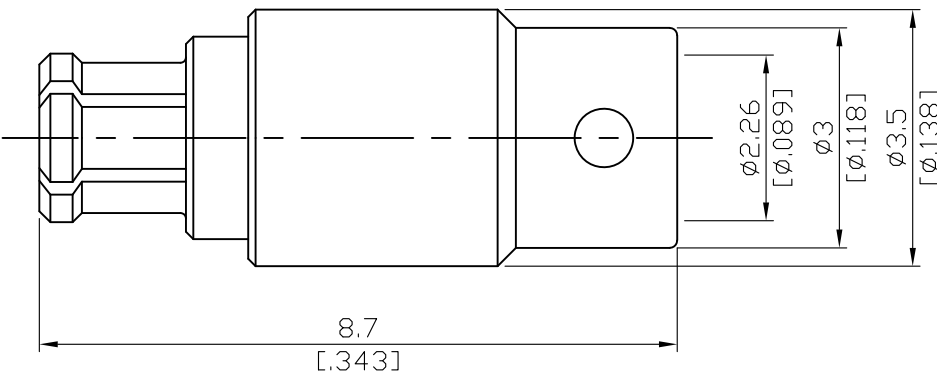

*Using 5002

Parts	Material	Plating (Micro-inch)
Body	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Suitable Cables: 5002; SS405; T-Flex 405; Multiflex 405 .085SRF-W-P-50-F

SMPM		SMPM8300-5002																			
Interface MIL STD-348B																					
Electrical Data <table><tr><td>Impedance</td><td>50Ω</td></tr><tr><td>Frequency range</td><td>DC to 18GHz</td></tr><tr><td>VSWR</td><td>≤ 1.2 (DC to 18GHz)</td></tr><tr><td>Insertion loss</td><td>≤ 0.1 x √f(GHz) dB</td></tr><tr><td>Insulation resistance</td><td>≥ 5000 MΩ</td></tr><tr><td>Contact resistance inner conductor</td><td>≤ 6mΩ</td></tr><tr><td>Contact resistance outer conductor</td><td>≤ 2mΩ</td></tr><tr><td>Dielectric withstanding voltage (at sea level)</td><td>325</td></tr></table>					Impedance	50Ω	Frequency range	DC to 18GHz	VSWR	≤ 1.2 (DC to 18GHz)	Insertion loss	≤ 0.1 x √f(GHz) dB	Insulation resistance	≥ 5000 MΩ	Contact resistance inner conductor	≤ 6mΩ	Contact resistance outer conductor	≤ 2mΩ	Dielectric withstanding voltage (at sea level)	325	
Impedance	50Ω																				
Frequency range	DC to 18GHz																				
VSWR	≤ 1.2 (DC to 18GHz)																				
Insertion loss	≤ 0.1 x √f(GHz) dB																				
Insulation resistance	≥ 5000 MΩ																				
Contact resistance inner conductor	≤ 6mΩ																				
Contact resistance outer conductor	≤ 2mΩ																				
Dielectric withstanding voltage (at sea level)	325																				
Mechanical Data <table><tr><td>Engagement force</td><td>Full Detent</td><td>Smooth bore</td><td></td></tr><tr><td></td><td>3.5 typical</td><td>1.5 typical</td><td>lbs</td></tr><tr><td>Disengagement force</td><td>5 typical</td><td>1.5 typical</td><td>lbs</td></tr><tr><td>Durability (mating)</td><td>≥ 100</td><td>≥ 1000</td><td></td></tr><tr><td>Contact pin captivation</td><td colspan="3">≥ 1.5lbs</td></tr></table>		Engagement force	Full Detent	Smooth bore			3.5 typical	1.5 typical	lbs	Disengagement force	5 typical	1.5 typical	lbs	Durability (mating)	≥ 100	≥ 1000		Contact pin captivation	≥ 1.5lbs		
Engagement force	Full Detent	Smooth bore																			
	3.5 typical	1.5 typical	lbs																		
Disengagement force	5 typical	1.5 typical	lbs																		
Durability (mating)	≥ 100	≥ 1000																			
Contact pin captivation	≥ 1.5lbs																				
Environmental Data <table><tr><td>Temperature range</td><td>-65°C to +165°C</td></tr><tr><td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr><tr><td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr><tr><td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr><tr><td>RoHS</td><td>Compliant</td></tr></table>					Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant							
Temperature range	-65°C to +165°C																				
Thermal shock	MIL-STD-202, Method 107, Condition B																				
Moisture resistance	MIL-STD-202, Method 106																				
Corrosion	MIL-STD-202, Method 101, Condition B																				
RoHS	Compliant																				
Tooling <table><tr><td>Soldering fixture</td><td>ST-008</td></tr><tr><td>Insert for .085inch semi-rigid cable</td><td>ST-009</td></tr><tr><td>Locator tool</td><td>ST-011</td></tr></table>					Soldering fixture	ST-008	Insert for .085inch semi-rigid cable	ST-009	Locator tool	ST-011											
Soldering fixture	ST-008																				
Insert for .085inch semi-rigid cable	ST-009																				
Locator tool	ST-011																				

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY RECOMMENDATION

SMPM8300-5002		DATE	2020/05/07	REV	—
A		B			
BODY		CONTACT PIN			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN AND TIN DIP BRAIDING.			
		Step 2: STRIP AS SHOWN.			
		Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ".			
		Step 4: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				<i>Albert</i>	