


FAT-TM7FF7T3G2W2

3GHz TNC Plug To F Jack Fixed Attenuator 75Ω

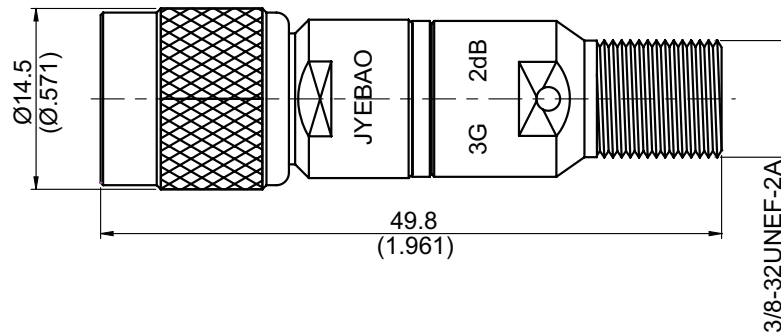

Nominal impedance: 75Ω±0.25Ω .  
 Frequency range: DC to 3GHz.  
 VSWR deviation: ±0.1% over operating temperature range.  
 Rated Power: 250 mW  
 Operating Temp Range: -55 to 120°C.

| Attenuation | VSWR    | Attenuation deviation (+/-dB) |        |
|-------------|---------|-------------------------------|--------|
|             | DC-3GHz | DC-2GHz                       | 2-3GHz |
| 2dB         | ≤1.3    | ±0.3dB                        | ±0.5dB |

| Parts            | Material        | Plating (Micro-inch)                                  |
|------------------|-----------------|---|
| Insulator        | Teflon          |   |
| Contact Pin(F)   | Phosphor Bronze | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Contact Body     | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Ferrule          | Brass           | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Body             | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Washer           | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Gasket           | Silicon         |   |
| Contact Pin(TNC) | Brass           | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Coupling Nut     | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |

Weight:

**This part number complies with RoHS.**

**Notice: JYEBAO reserves the right to make modifications deemed appropriate.**