


FAT-TM7FF7T3G2W6

3GHz TNC Plug To F Jack Fixed Attenuator 75Ω

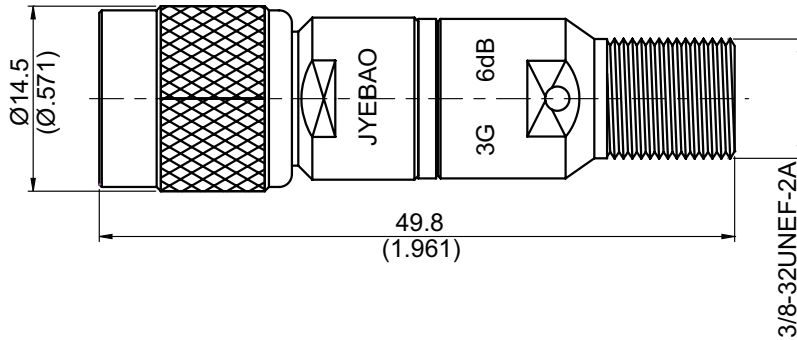

Nominal impedance: 75Ω±0.25Ω .
 Frequency range: DC to 3GHz.
 VSWR deviation: +/-0.1% over operating temperature range.
 Rated Power: 250 mW
 Operating Temp Range: -55 to 120°C.

Attenuation	VSWR	Attenuation deviation (+/-dB)	
	DC-3GHz	DC-2GHz	2-3GHz
6dB	≤1.3	+/-0.3dB	+/-0.5dB

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin(F)	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Contact Pin(TNC)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.