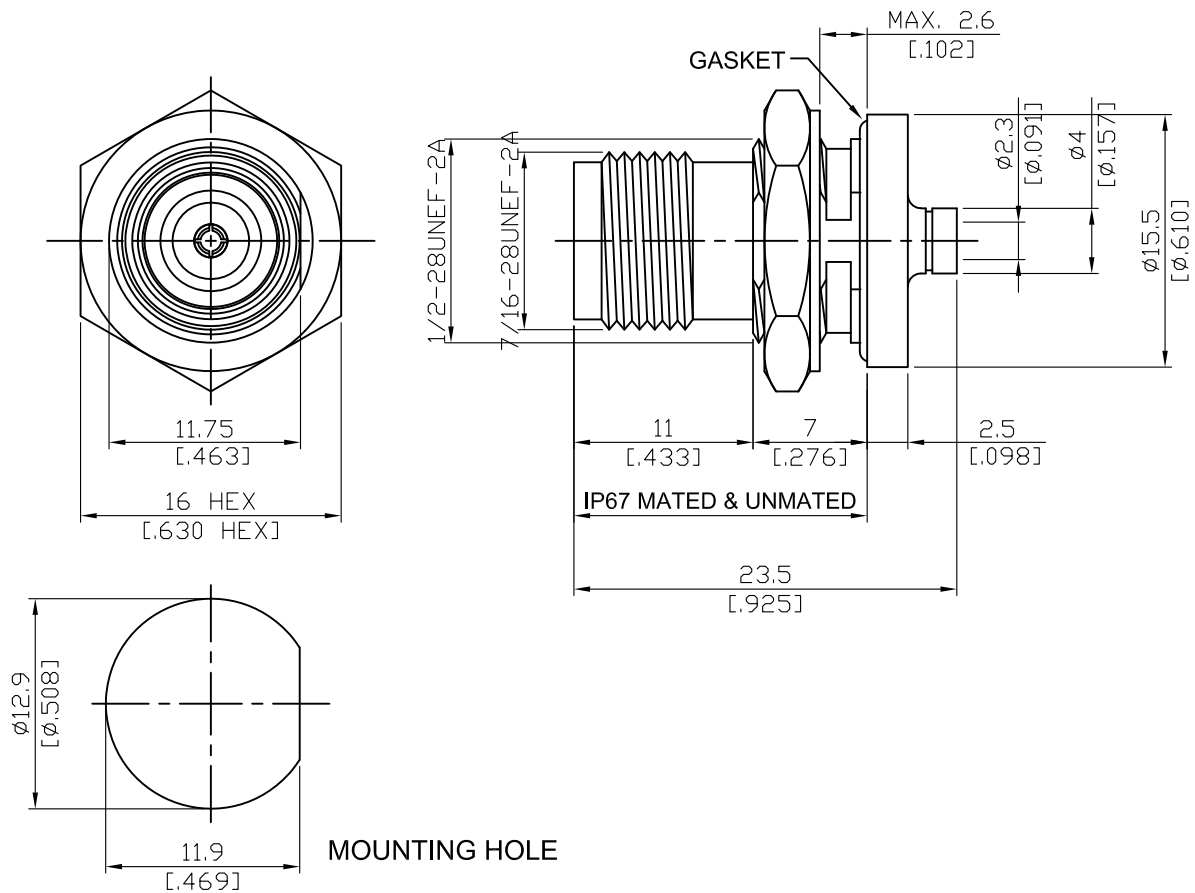


TNC8305NIA-0085/IP

TNC jack solder bulkhead for RG405; IP67
mated & unmated; 8GHz VSWR 1.25

50Ω



Parts	Material	Plating (Micro-inch)
Body	Brass	Nickel 200 Over Copper 50
Insulator	Teflon	
Contact Pin	P.Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Lock Washer	Brass	Nickel 200 Over Copper 50
Hex Nut	Brass	Nickel 200 Over Copper 50

Suitable Cables: .085semi-rigid, .085 conformable

This part number complies with RoHS.



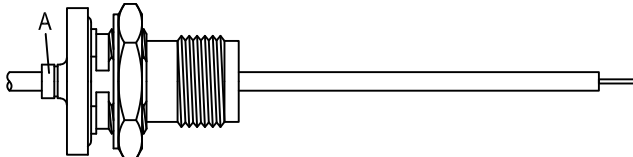
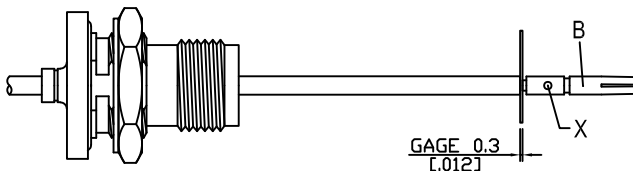
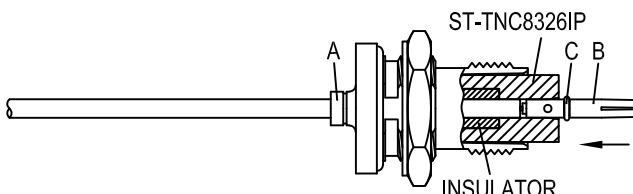
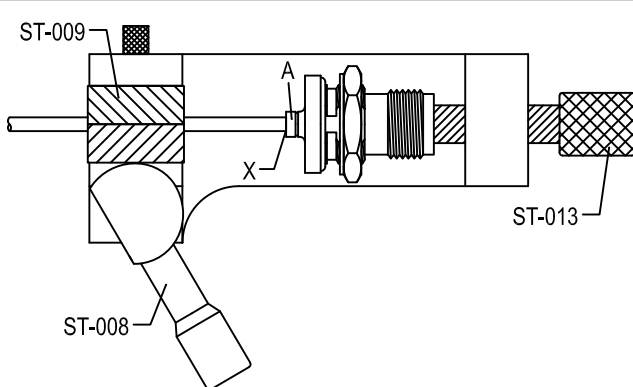
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

TNC	TNC8305NIA-0085/IP																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 8GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.25 (DC to 8GHz)</td></tr> <tr> <td>Insertion loss</td><td>$\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB</td></tr> <tr> <td>Insulation resistance</td><td>$\geq 5000\text{M}\Omega$</td></tr> <tr> <td>Contact resistance inner conductor</td><td>$\leq 1.5\text{m}\Omega$</td></tr> <tr> <td>Contact resistance outer conductor</td><td>$\leq 1\text{m}\Omega$</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>1500 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>500 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 8GHz	VSWR	≤ 1.25 (DC to 8GHz)	Insertion loss	$\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB	Insulation resistance	$\geq 5000\text{M}\Omega$	Contact resistance inner conductor	$\leq 1.5\text{m}\Omega$	Contact resistance outer conductor	$\leq 1\text{m}\Omega$	Dielectric withstanding voltage (at sea level)	1500 V rms	Working voltage (at sea level)	500 V rms
Impedance	50Ω																		
Frequency range	DC to 8GHz																		
VSWR	≤ 1.25 (DC to 8GHz)																		
Insertion loss	$\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB																		
Insulation resistance	$\geq 5000\text{M}\Omega$																		
Contact resistance inner conductor	$\leq 1.5\text{m}\Omega$																		
Contact resistance outer conductor	$\leq 1\text{m}\Omega$																		
Dielectric withstanding voltage (at sea level)	1500 V rms																		
Working voltage (at sea level)	500 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>4.1 to 6.1 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>15 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥ 101.2 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥ 6.1 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Recommended coupling nut torque	4.1 to 6.1 inch lbs	Coupling proof torque	15 inch lbs	Coupling nut retention force	≥ 101.2 lbs	Contact captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500								
Recommended coupling nut torque	4.1 to 6.1 inch lbs																		
Coupling proof torque	15 inch lbs																		
Coupling nut retention force	≥ 101.2 lbs																		
Contact captivation-axial	≥ 6.1 lbs																		
Durability (mating)	≥ 500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Bushing</td><td>ST-TNC8326IP</td></tr> <tr> <td>Soldering gauge</td><td>ST-0.3</td></tr> <tr> <td>Locator tool</td><td>ST-013</td></tr> <tr> <td>Soldering fixture</td><td>ST-008</td></tr> <tr> <td>Insert for soldering insert</td><td>ST-009</td></tr> </table>		Bushing	ST-TNC8326IP	Soldering gauge	ST-0.3	Locator tool	ST-013	Soldering fixture	ST-008	Insert for soldering insert	ST-009								
Bushing	ST-TNC8326IP																		
Soldering gauge	ST-0.3																		
Locator tool	ST-013																		
Soldering fixture	ST-008																		
Insert for soldering insert	ST-009																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

TNC8305NIA-0085/IP		DATE	2020/04/03	REV	A
A		B	C		
					
BODY + GASKET + WASHER + HEX NUT		CONTACT PIN	GASKET		
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE CONNECTOR " A " OVER CABLE.			
		Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ". USE 0.3 MM GAGE ST-0.3.			
		Step 4: SLIDE BUSHING " ST-TNC8326IP " IN PLACE. Step 5: APPLY WATERPROOF GLUE ON GASKET " C " AND PUT IT ON THE PIN " B ". Step 6: SLIDE PIN " B " TOWARDS CONNECTOR BODY " A " AND BUSHING.			
		Step 7: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-013 " TO FIX THE CONNECTOR. SOLDER IN " X ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	