


HPT-AF0/10G20W50

10 GHz 20 Watt SMA Jack Termination 50Ω

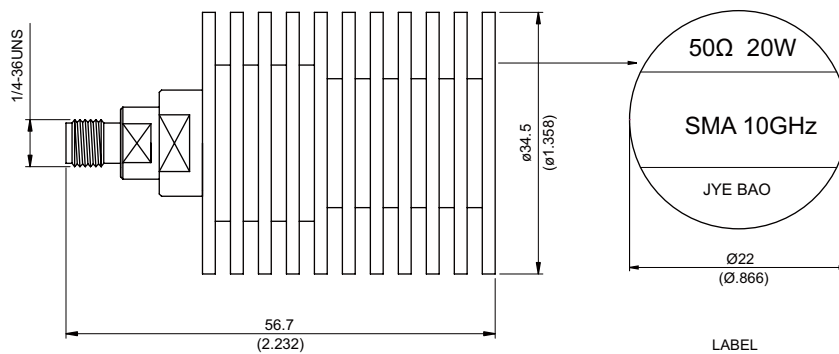

Male/ Female	Frequency Range (GHz)	Imped. Ohm	Power Watt	VSWR			
				1G	3G	6G	10G
Female	0 to 10GHz	50Ω	20W	≤1.05	≤1.1	≤1.2	≤1.35

Parts	Material	Plating (Micro-inch)
Heat Sink	Aluminum	Black Chromium 100
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50
Insulator	Teflon	
SMA Body	Brass	Gold 5 Over Nickel 50 Over Copper 50

Weight: 80.95 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.